

1 Base Tool | 3 Attachments

The new battery-hydraulic
Interchangeable Head System US-12M

3in1

Video US-12M



NEW

Battery-hydraulic Base Tool US-12M

- for 3 different interchangeable heads
(Art. No. 216626, Art. No. 216627, Art. No. 216628)
- einfacher Wechsel der Köpfe
- lockable by 2 extractable bolts
- Head 180° rotatable
- **Selector switch for**
 - automatic return
 - 50% automatic return
 - manual return
- Sensor mode switchable for pressing and cutting
- 2 white LEDs for workspace illumination
- Crimping force in kN: 120
- Working pressure in bar: 700
- Battery charging time in minutes: 60
- Battery type: Li-Ion, 18 V, 4 Ah

The different colors of the sensor LED indicate if the operation has been completed successfully or if an error occurred.

- LED green: crimping completed
in accordance with standards, motor stopped
- LED orange: battery voltage insufficient
- LED red: crimping not correctly completed



Variant **216625-1** contains:

- Machine
- System case incl. insert
- Battery and charger



Variant **216625-1-N0** contains:

- Machine
- System case incl. insert
- **No battery and no charger**



Variant **216625-1-N** contains:

- Machine in transport packaging



Art. No. 216625-1

Base Tool
incl. battery and charger in case

Art. No. 216625-1-N

Base Tool
Machine in transport packaging

Art. No. 216625-1-N0

Base Tool
without battery, without charger



Crimping head U-KDE500-12

Art. No. 216626

Indent crimping

Pressing head 180° rotatable, in plastic case, no inserts necessary, mandrel pressing

- Crimping force in kN: 120
- Working pressure in bar: 700
- Hinged head
- Cable lugs: standard Cu 35-500 • DIN AL 95-500
- Connectors: standard Cu 35-500 • DIN AL 95-500
- Weight in kg: 1,284



Crimping head U-K0400-12


400-C12

Art. No. 216627

Without dies

in plastic case, without inserts

- Crimping force in kN: 120
- Working pressure in bar: 700
- Opening / Stroke: 53 mm
- Hinged head
- Pressing width: wide
- Cable lugs: standard Cu 10-400 • DIN Cu 10-300 • DIN AL 16-300
- Connectors: standard Cu 10-400 • DIN Cu 10-300 • DIN AL 16-300
- **Use of all dies in the 400-C12 series possible**
- Weight in kg: 1,332

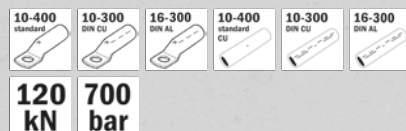

Cutting head U-KS12-S85

Art. No. 216628

Cutting width Ø: 85 mm

Cutting head 180° rotatable, for copper and aluminum cables

- Crimping force in kN: 120
- Working pressure in bar: 700
- Cutting width Ø: 85 mm
- Weight in kg: 5,483



Your electrical wholesale:

DIN EN ISO 9001
ZERTIFIKAT



HAUPA-Group
www.haupa.com

haupa

... convincing solutions

Germany: HAUPA GmbH & Co. KG, Lange Str. 40, D-42857 Remscheid, Phone: +49 2191 8418-0, Fax: +49 2191 8418-840, E-mail: sales@haupa.com.
Prices on request. Errors and technical changes reserved.