

EN

**Special offer**  
International

# Plumbing program 2023





## Bath installation set "deluxe" | 16 pieces

1/2"

Art. no. 677-1

16 pieces

### 16 pieces, Content:

- S-bend connector assembly tool, 3/4"
- Corner valve screwing aid
- Universal screw bit up to 21 mm
- Valve holder for eccentric and standard valves
- Toilet seat assembly wrench
- Ratchet wrench, 4 in 1
- Combination basin cock wrench 13 mm with 5 bits 9, 10, 11, 12, 14 mm and 1 claw
- Deep hole marker for all surfaces
- Reversible ratchet, 1/2", CV steel, with internal and external square drive bit
- Hanger bolt screwdriver Ø 10 mm



## Glass tile drill set

- 5 piece
- Sizes: 2 x 6, 2 x 8.1 x 10 mm
- optimally designed for cordless power tools
- 1/4" hexagonal shaft
- pointed chisel edge enables precision drilling, can be re-sharpened

**Please note: Only use in rotation (low rotation speed) and in sufficiently cool.**

Areas: ceramics, tiles, hard-fired tiles, glass, acrylic glass, mirror glass

Art. no. 1368

5 pieces






## Water pump pliers „BRlpowerXL“

Art. no. 687/400

Ø 3 ½ Inch

The BRINKO pipe wrench „BRlpowerXL“ with slip joint for larger pipe diameters and large-edged screw connections fits in every tool case despite its large diameter.

The maximum lever arm greatly facilitates work thanks to the optimum force transmission. The setting is made using an INOX pushbutton directly on the workpiece, and is extremely easy compared to a pipe wrench. The „BRlpowerXL“ has a hand-friendly handle setting with finger clamp protection.

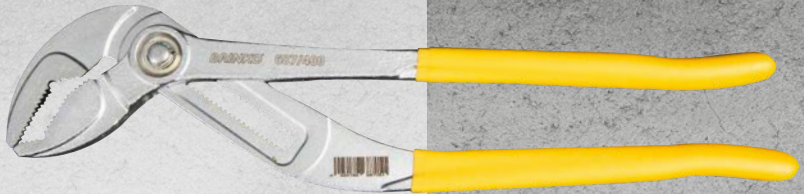

- Chrome-Vanadium-Steel, chrome-plated
- Grip surfaces are hardened inductively
- INOX pushbutton and spring
- Self-clamping to tubes and nuts
- With finger clamp protection.
- Anti-slip handles, soft dip-insulated, yellow
- With pushbutton single-and adjustment
- 27-level fine adjustment

### Dimensions:

Total length: 1130 mm

Pipe diameter: 3 ½ inch

Pipe diameter: 104 mm

Width across flats for octagonal bolts: 100 mm

Width across flats for hexagonal nuts: 95 mm

Weight: 1350 g





## Socket wrench set "BRImultiLock" | 87 pieces

1/2" 1/4"

Art. no. 127-1

87 pieces

### Troubleshooter!

#### BRINKO „BRImultiLock“ for damaged, contorted Hex-Bolts

- Reversible ratchet with inner and outer hexagon
- twelve-tooth profile, 1/2" and 1/4" drive

Material: Cr-V 50BV30 steel | Industrial quality | Standards: DIN 3124; ISO 2725 | Finishing: Silver mat finished | Profile: BRImultiLock - Best solution for varity bolts | Torsion: 30-50% (depends on size) higher than DIN | Life-Time: 200k circle times at 35% of DIN | square drive

### Content:

- Plumber Ratchets 1/4", 1/2"
- Universal joint 1/4", 1/2"
- Spinner Handle incl. adapter 1/4", 150 mm
- Sliding T Bar 1/4", 150 mm
- Extension Bar 1/4", 50 - 100 mm
- Extension Bar 1/2", 125 - 250 mm
- Plug Sockets 1/2", 16 - 21 mm
- Bit Adapter 1/2" - 5/16"
- BRImultiLock Socket 1/2" SW 10 - 12 - 13 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 mm
- Deep Socket 1/2" SW 14 - 15 - 17 - 19 mm
- BRImultiLock Socket 1/4" SW 4 - 4.5 - 5 - 5.5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 mm
- Deep Socket 1/4" SW 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm
- Bits, slot 1/4" 4 - 5.5 - 6.5 mm
- Bits, cross slot 1/4" PH 1, 2 | PZ 1, 2
- Bits, allen key 1/4" 3 - 4 - 5 - 6 mm
- Bits, Tx 1/4" Tx 8 - 10 - 15 - 20 - 25 - 30
- Bits, cross slot 1/4" PH 1, 2 | PZ 1, 2
- Bits, allen key 1/4" 3 - 4 - 5 - 6 mm
- Bits, Tx 1/4" Tx 8 - 10 - 15 - 20 - 25 - 30
- Bit Adapter 1/4 - 5/16"
- Bits, slot 5/16" 8 - 10 - 12 mm
- Bits, cross slot 5/16" PH 3, 4 | PZ 3, 4
- Bits, allen key 5/16" 8 - 10 - 12 - 14 mm
- Bits, Tx 5/16" Tx 40 - 45 - 50 - 55

**Troubleshooter!**  
BRINKO „BRImultiLock“  
for damaged, contorted  
Hex-Bolts





## Socket wrench set "BRImultiLock" | 55 pieces

1/4"

Art. no. 122

55 pieces

### Troubleshooter!

#### BRINKO „BRImultiLock“ for damaged, contorted Hex-Bolts

- Reversible ratchet with inner and outer hexagon
- twelve-tooth profile, 1/4" drive

Material: Cr-V 50BV30 steel | Industrial quality | Standards: DIN 3124; ISO 2725 | Finishing: Silver mat finished | Profile: BRImultiLock - Best solution for variety bolts | Torsion: 30-50% (depends on size) higher than DIN | Life-Time: 200k circle times at 35% of DIN | square drive

### Content:

#### Content:

- Plumber Ratchets 1/4"
- Universal joint 1/4"
- Sliding T Bar 1/4"
- Spinner Handle incl. adapter 1/4", 150 mm
- Hex keys 1,5 - 2,0 - 2,5
- Extension Bar 1/4", 50 - 100 mm
- BRImultiLock Socket 1/4" SW 4 - 4.5 - 5 - 5.5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 mm
- Deep Socket 1/4" SW 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm
- Socket Tx-E 1/4" E 4 - 5 - 6 - 7 - 8
- Bits, cross slot 1/4" PH 1, 2, 3 | PZ 1, 2, 3
- Bits, slot 1/4" 4 - 5.5 - 7 mm
- Bits, allen key 1/4" 3 - 4 - 5 - 6 - 7 mm
- Bits, Tx 1/4" Tx 8 - 10 - 15 - 20 - 25 - 27 - 30 - 40

**Troubleshooter!**  
**BRINKO „BRImultiLock“**  
**for damaged, contorted**  
**Hex-Bolts**





## Carbon steel, stainless steel pipe cutter

**Special pipe cutter for INOX, C-steel and Cu pipes**  
**For pipes with Ø 3 35 mm or 1", up to 3 mm wall thickness**

### Body

- magnesium die casting
- especially light 1/3 lighter than aluminum | almost 1/2 lighter than zinc diecast | 200 g lighter than 633-70/35 yet as strong as zinc die-cast
- best strength/weight ratio of any metal
- easily 100 % recyclable
- modern material, increasingly also used in automotive engineering
- powdercoated (not smoothly painted), thus better feel/grip for dirty (oily, greasy)/sweaty hands

### Guide rollers

- **needle bearing** | 2 needle bearings per roller stainless steel rollers
- no more recess for cutting close to the flange, thus optimal guiding of the Inox tube

### Fast running spindle

- extra strong
- zinc die casting
- high dimensional accuracy
- high surface quality (low roughness)
- easy to machine: high accuracy

### Integrated rotary deburrer

- Noga deburrer (one of the best blade manufacturers in the world)
- removable, easier deburring without moving the whole RAS

### Spare cutting wheel

- Art. No. 633-75A
- size: 19 x 5 mm
- **Additional spare wheel in the handle!**
- change without additional tool

### Handle

- zinc die casting
- easy to bring the wheel to the tube due to the heavier zinc diecast swing whandle

Cutting wheel with  
needle bearing



**Art. no. 633-71/35**

Pipe Ø 3 – 35 mm





## Pipe cutter with deburrer for stainless steel, copper and brass pipes, plastic and composite pipes

### With extra strong fast running spindle

- 4-roller guide with groove for beading
- integrated rotation deburrer
- 1 cutting wheel for stainless steel, copper and brass pipes, Art. no. 632-1
- 1 cutting wheel for plastic and composite pipes, Art. no. 633-1 (only integrated in the handle of Art. no. 633/35)

**Art. no. 633/35**

Pipe Ø 3 – 32 mm



## Pipe deburrer

- for internal and external deburring of stainless steel, brass, aluminium and plastic pipes
- robust quality tool: stiff aluminium housing and very fine deburrer blade

**Art. no. 648/35**

Pipe Ø 8 – 35 mm

**Art. no. 648/54**

Pipe Ø 10 – 54 mm





## Automatic plastic tube shears

Art. no. 635/35

Pipe Ø 35 mm

- With lever transmission
- For tubes in PVC, PE, PD, PEX, PVDF with a wall thickness of up to 2 mm and composite tubes
- Single-hand operation and recoil-free ratchet mechanism, high safety standard
- Durable blade made of tempered steel with a precise angle for easy cutting of plastic tubes, with V-cut
- Little power required thanks to special teeth design
- Precise pinpoint cut without deformation of the tubes, wide tube base
- Rubber-coated handle and powder-coating for a secure hold without slipping
- Transport lock and latch
- Blade with fast retraction
- Easy blade exchange





## DIAMOND core drills set "BRIdiamondDrill"

Art. no. 1381

7 pieces

drilling without a centring aid,

7-pieces: Ø 2 x 6, 2 x 8, 10, 12, 14 mm

- connector M14 to be used with the angle grinder
- hi-grade diamond grains for fast working, provide clean results
- perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- extremely long service life thanks to high speeds (recommended: 10,000 – 14,000 rpm)
- special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled



## Cut-off disk | INOX

- certified according to VBG 49
- for cutting stainless steel, steel and other metals
- thickness 1.2 mm or 1.6 mm (with diameter 150 mm)
- bore 22 mm



Art. no. 6215/115

Ø 115 mm



Art. no. 6215/125

Ø 125 mm



Art. no. 6215/150

Ø 150 mm



Art. no. 6215/230

Ø 230 mm

