Plumbing program 2024

RRINISTO 633135

50ecial offer

International

JULI

R.P.


EN

Water pump pliers

The BRINKO pipe wrench "BRIpowerXL" with slip joint for larger pipe diameters and large-edged screw connections fits in every tool case despite its large diameter.

The maximum lever arm greatly facilitates work thanks to the optimum force transmission. The setting is made using an INOX pushbutton directly on the workpiece, and is extremely easy compared to a pipe wrench. The "BRIpowerXL" has a hand-friendly handle setting with finger clamp protection.

- Chrome-Vanadium-Steel, chrome-plated
- Grip surfaces are hardened inductively
- · INOX pushbutton and spring
- · Self-clamping to tubes and nuts
- With finger clamp protection
- Anti-slip handles, soft dip-insulated, yellow
- With pushbutton single-and adjustment
- 27-level fine adjustment



Art. no.		‡() mm	‡Omm	‡O "
687/150	150	30	32	1 1/4
687/180	180	36	40	1 1/2
687/250	250	46	50	2
687/300	300	60	70	2 3/4



haupa.com

BRINKTO' 637/130

Art. no. 687/400 Water pump pliers "BRIpowerXL" Ø 3 ½ Inch The BRINKO pipe wrench "BRIpowerXL" with slip joint for larger pipe diameters and large-edged screw connections fits in every tool case despite its large diameter. The maximum lever arm greatly facilitates work thanks to the optimum force transmission. The setting is made using an INOX pushbutton directly on the workpiece, and is extremely easy compared to a pipe wrench. The "BRIpowerXL" has a hand-friendly handle setting with finger clamp protection. BRANETTS CRETANIC · Chrome-Vanadium-Steel, chrome-plated · Grip surfaces are hardened inductively · INOX pushbutton and spring · Self-clamping to tubes and nuts · With finger clamp protection

- · Anti-slip handles, soft dip-insulated, yellow
- With pushbutton single-and adjustment
- 27-level fine adjustment

Dimensions:

Total length: I → I mm Pipe diameter: I ○ 3 ½ inch Pipe diameter: I ○ 104 mm Width across flats for octagonal bolts: I ○ 100 mm Width across flats for hexagonal nuts: I ○ 95 mm Weight: 1350 g



= (| |)

Corner pipe pliers

- · Chrome vanadium steel, forged
- special hardened teeth
- · S-opening, polished
- · finger pinch protection

Art. no.		‡Omm	‡O "
619/1	320	0 - 49	1
619/11/2	440	0 - 68	1 1/2
619/2	560	0 - 85	2



Consisting of:

1 corner pipe pliers 1" Art. no. 619/1

1 corner pipe pliers 1 1/2" Art. no. 619/11/2

1 water pump pliers 240 mm Art. no. 685/240

- corner pipe pliers with S-opening and finger pinch protection
- special hardened teeth



Art. no. 619/1

Art. no. 619/2 Ø 2 Inch

Ø 1 Inch

Art. no. 619/11/2

Ø 1 ½ Inch






639/200

Fittings pliers | Key pliers

- · Chrome vanadium steel, matt chrome-plated
- automatic jaw width adjustment, with push-button single hand adjustor
- with finger pinch protection, a parallel gripping and a moving jaw
- smooth, polished gripping surfaces
- · soft dip insulated anti-slip handles, yellow
- · weight-reduced



- 10 times hand force
- replaces open-end wrench set

Art. no.		‡🔿 mm	‡O "
689/180	180	36	1 7/16
689/240	240	50	2
689/300	300	68	2 1/2



Art. no. 83 Ratchet wrenches 4 in 1 Length 200 mm 4 in 1 The ratchet wrench handles 4 different nut sizes Sizes: 10 x 13 mm and 17 x 19 mm • finely toothed 72 teeth of the 2 ratchets - ratchets can be switched to clockwise/counterclockwise operation · due to 12-slided toothing, the wrench easily grips 4, 6 and 12-sided screws as well as almost round nuts · Chrome-vanadium steel, chrome-plated · extremely robust BRINKO 19mm 10mm 10 x 13 mm 17 x 19 mm Art. no. 102/8 Art. no. 102/10 Ο **Hanger bolt driver** Ø 8 mm Ø 10 mm Multidirectional hanger bolt driver • Screw-in and screw-out tool hanger bolt driver Ø 8 mm and Ø 10 mm · self-clamping when turned · for fast and effortless screwing and unscrewing of stay bolts, express and hanger bolts without damaging the thread · with hexagonal driver for power tools 02/8



haupa.com



Combination angle valve key

The right tool, especially in tight spaces.

For damage-free installation of combination angle valves, which, in addition to connecting a mixer tap, also have an outlet for items like a dishwasher or washing machine.

Common 1/2" ratchets or socket wrenches are used for driving.





AUDE

Sleeve extractor set

For the extraction of threaded pipe connections, sleeves and nipples

- · Left-hand extractor
- · CrV-steel, hardened
- · Surface burnished
- · Polished cutting surface

The service life of the extractors varies depending on the hardness of the counter material, save high-quality products! Knock the extractor into the drill hole and loosen the screw.

Content:

- 1 sleeve extractor 3/8"
- 1 sleeve extractor 1/2" 3/4"
- 1 hexagonal insert 1/2", size 26
- 1 hexagonal insert 1/2", size 19
- 1 reversible ratchet, inner and outer square
- drive bit, 1/2" drive



Art. no. 1088

5 pieces







haupa.com

Handwheel socket "BRIwheelNut"

A special tool with bars that engage in the opening of almost all handwheels and that can be driven with a ½" ratchet!

Now even the most stubborn barriers are solved with ease!

A problem that every craftsman in the plumbing and heating industry knows!

In the field of domestic water or heating supply, a component must be replaced. In order to facilitate this, shut-off devices such as valves or slide valves were installed in front of replaceable components during construction.

Now such a component as a water meter or a pump has to be replaced.

The valves or gates in front of and behind these components have not been moved for a long time and are therefore so tight that the force of the hand is not sufficient to move the valve or gate, let alone shut off the pipe tightly.

In order to achieve this, pliers, levers and obscure constructions are used. In most cases, this approach leads to the breakage of the cast iron handwheel, to bending or even to the tearing off of the spindle, since the rotational force is applied laterally.

The company BRINKO has addressed this nuisance and developed the handwheel socket "BRIwheelNut".

The special tool, which is protected with a design pattern, consists of a basic body with protruding webs that engage in the openings of almost all handwheels and that can be driven with a $\frac{1}{2}$ " ratchet. Due to the force applied centrally from above and the distribution of the pressure points over several surfaces, a non-destructive actuation of valves and slides is made possible.

The time saved and the avoided hassle of removing a destroyed valve with complete shut-off of the water supply or running a heating system empty with subsequent venting of all radiators makes the "BRIwheelNut" an indispensable and cost-saving helper.

Art. no. 129-50

1/2" Ratchet

NEW

1/2"

111

Socket wrench set "BRImultiLock" 87 pieces



Art. no. 127-1 87 pieces

Troubleshooter!

BRINKO "BRImultiLock"

Hex-Bolts

for damaged, contorted

Troubleshooter!

BRINKO "BRImultiLock" for damaged, contorted Hex-Bolts

- · Reversible ratchet with inner and outer hexagon
- twelve-tooth profile, 1/2" and 1/4" drive

Material: Cr-V 50BV30 steel | Industrial quality | Standards: DIN 3124: ISO 2725 | Finishing: Silver mat finished | Profile: BRImultiLock - Best solution for varity bolts | Torsion: 30-50% (depends on size) higher than DIN | Life-Time: 200k circle times at 35% of DIN | square drive

Content:

- Plumber Ratchets 1/4", 1/2"
- Universal joint 1/4", 1/2"
- Spinner Handle incl. adapter 1/4", 150 mm
- Sliding T Bar 1/4", 150 mm
- Extension Bar 1/4", 50 100 mm
- Extension Bar 1/2", 125 250 mm
- Plug Sockets 1/2", 16 21 mm
- Bit Adapter 1/2" 5/16"
- BRImultiLock Socket 1/2" SW 10 12 13 15 16 -17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 mm
- Deep Socket 1/2" SW 14 15 17 19 mm
- BRImultiLock Socket 1/4" SW 4 4.5 5 5.5 6 -7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 mm
- Deep Socket 1/4" SW 6 7 8 9 10 11 12 -13 mm
- Bits, slot 1/4" 4 5.5 6.5 mm
- Bits, cross slot 1/4" PH 1, 2 | PZ 1, 2
- Bits, allen key 1/4" 3 4 5 6 mm
- Bits, Tx 1/4" Tx 8 10 15 20 25 30
- Bits, cross slot 1/4" PH 1, 2 | PZ 1, 2
- Bits, allen key 1/4" 3 4 5 6 mm
- Bits, Tx 1/4" Tx 8 10 15 20 25 30
- Bit Adapter 1/4 5/16"
- Bits, slot 5/16" 8 10 12 mm
- Bits, cross slot 5/16" PH 3, 4 | PZ 3, 4
- Bits, allen key 5/16" 8 10 12 14 mm
- Bits, Tx 5/16" Tx 40 45 50 55



0 0 in

haupa.com

Socket wrench set "BRImultiLock" 55 pieces



Troubleshooter!

BRINKO "BRImultiLock" for damaged, contorted Hex-Bolts

- · Reversible ratchet with inner and outer hexagon
- twelve-tooth profile. 1/4" drive

Material: Cr-V 50BV30 steel | Industrial quality | Standards: DIN 3124; ISO 2725 | Finishing: Silver mat finished | Profile: BRImultiLock - Best solution for varity bolts | Torsion: 30-50% (depends on size) higher than DIN | Life-Time: 200k circle times at 35% of DIN | square drive

Content:

- Plumber Ratchets 1/4"
- Universal joint 1/4"
- Sliding T Bar 1/4"
- Spinner Handle incl. adapter 1/4", 150 mm
- Hex keys 1,5 2,0 2,5
- Extension Bar 1/4", 50 100 mm
- BRImultiLock Socket 1/4" SW 4 4.5 5 5.5 6 7 8 9 -10 - 11 - 12 - 13 - 14 mm
- Deep Socket 1/4" SW 6 7 8 9 10 11 12 -13 mm
- Socket Tx-E 1/4" E 4 5 6 7 8
- Bits, cross slot 1/4" PH 1, 2, 3 | PZ 1, 2, 3
- Bits, slot 1/4" 4 5.5 7 mm
- Bits, allen key 1/4" 3 4 5 6 7 mm
- Bits, Tx 1/4" Tx 8 10 15 20 25 27 30 40



Troubleshooter!

BRINKO "BRImultiLock"

for damaged, contorted

Hex-Bolts

iiiiiaaaaa

Screwdriver set




Art. no. 2122 Slot-head / Pozidriv

• 6 pieces:

4 slot-head screwdrivers 80 x 3, 100 x 4, 125 x 5.5, 150 x 6.5 mm 2 Pozidriv screwdrivers PZ 1, PZ 2

- · chrome vanadium steel
- · matt chrome-plated blades
- · 2-component handle with a hole







Art. no. 2126/7 Slot-head / Pozidriv

• 7 pieces, 1000 V: 4 slot-head screwdrivers 1000 V 75 x 2.5, 100 x 4, 125 x 5.5, 150 x 6.5 mm 2 cross-head screwdrivers 1000 V PZ 1, PZ 2 1 safety voltage tester 150 - 250 Volt (GS-certified)

ROLL REPRESSIVE

- · chrome vanadium steel
- · matt chrome-plated blades with protective insulation
- · 2-component hand with a hole
- · individually tested to IEC 60900

A 1000 V IEC 60900





ROLL REPRESSIVE







• 0 Þ in

Screwdriver set with striking cap



Art. no. 2128 Slot-head / Phillips

- 2 K impact screwdrivers
- Slot-head and cross-head PH with hexagonal shaft and striking cap
- · for attachment point with continuous blade and strike plate
- made of CV steel for direct impact transfer from plate to tip
 Sizes:
 - slot-head 1 x 3.5 | 1 x 4.5 | 1 x 5.5 | 1 x 6.5 cross-head 1 x PH1 size 5 | 1 x PH2 size 6





ROLL REPRESSIVE

Hex key set

- 9 pieces: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm
- Chrome vanadium steel, bright nickel-plated
- long design
- hex/ball-end combined
- · the ball-end allows you to screw up to a 30° angle
- · unfolding plastic holder allows free access
- · with belt clip



Art. no. 114 9 pieces, size: 1,5 - 10 mm

۲O

=][[]»]=

Claw-typee gripper magnetic

Everything is under control!

- flexible claw-type gripper, length 60 cm
- · ideal for gripping screws, nuts etc. that are difficult to reach


Art. no. 1830

Length: 600 mm

- the claw, with, spring-action-system', can be opened up to 23 $\rm mm$
- the additional magnet lifts metal parts up to 400 g
- the integrated LED allows to find dropped small-parts even in dark corners








(f) 🔘 🕨

haupa.com

in

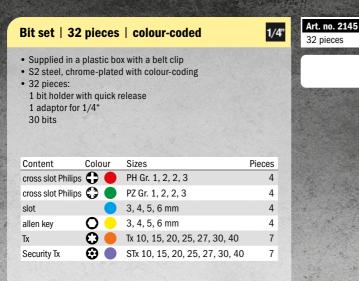



Bath installation set "deluxe" | 16 pieces



1/2"

16 pieces, Content:

- S-bend connector assembly tool, 3/4"
- Corner valve screwing aid
- · Universal screw bit up to 21 mm
- Valve holder for eccentric and standard valves
- · Toilet seat assembly wrench
- Ratchet wrench, 4 in 1
- Combination basin cock wrench 13 mm with 5 bits 9, 10, 11, 12, 14 mm and 1 claw
- · Deep hole marker for all surfaces
- Reversible ratchet, 1/2", CV steel, with internal and external square drive bit
- Hanger bolt screwdriver Ø 10 mm



Combination washbasin tap wrench

- for all fittings up to 14 mm, size 32 mm
- 4 inserts in shank: 9, 10, 11, 12 mm + 13 mm as shank
- · switchable claw with spring
- · knurled handle
- Sizes 8 and 14 mm on request Art. No. 655-1/8 and 655-1/14



Art. no. 655

6 pieces



Assembly Connection Gauge

- · Supplied in an impact-resistant plastic case
- dimensional and spatial alignment of all common installation inside dimensions 1/2" in bare brickwork
- · easily readable circular bubble and with depth adjustment
- fixed adjustment increments: 75, 100, 120, 153, 200, 240 mm
- · also fits for assembly rails 150 mm
- for bathtubs and shower mixers, corner and flush-mounted valves, pipe ventilators



Valve extension cutter with chip collection

- for trimming 1/2" valve extensions made of red brass
- with SDS chuck adaptor
- rubber cap collects the milled chips



Art. no. 705/1/2

... convincing solutions

Valve holder

· to lock eccentric and standard valves in place, when installing

- siphons and drains, on washbasins and sinks etc. · with a flexible T-handle
- · length 120 mm



Duo valve holder



Chrome-plated drain fittings installed in sinks tend to get scratched during installation, leading to customer frustration. To prevent this, there's the Automatic Duo Valve Holder. The Duo valve holder is inserted from the top into the drain valve and locks into place. Now, holding it during installation is no longer a problem, and there's no risk of slipping that could damage the chrome plating.

- For drain fittings in sizes 1" and 1 1/4"
- For use with a 1/2" drive."



NEW



BRINKO' 725

1/2"



Toilet seat & sanitary installation wrench "BRImultiKey" 19 in 1

The BRINKO Toilet seat & sanitary installation wrench 'BRImultiKey' 19 in 1 is a multi-talent for the different screw connections on toilet seats, and adapters on water taps and fittings (Perlators/aerators).

You practically do not need any other tools because this universal wrench combines almost everything in one tool.

- · Up to 19 adapter options
- Application with larger torques on very tight or rusted nuts, wing nuts, perlators or aerators
- Attractive form, comfortable and pleasant handles
- Reversible inserts (red) as a 'click system' for various sanitary attachments
- · Adapter options for 17 mm open-end wrench
- Inner adapter for wrench handle for a 1/2 inch ratchet wrench extension
- Universal wrench made of very durable and tough plastic PA6 (polyamide) and 30 % glass-fibres

WITHOUT an adapter:

Up to 11 different wing nuts of the toilet seat can be opened or screwed on.

WITH adapter:

Open and/or screw on 10 mm nuts (M6 threaded rods) or 13 mm nuts (M8 threaded rods).



Art. no. 662

17 mm | ½ Inch



Carbon steel, stainless steel pipe cutter

Special pipe cutter for INOX, C-steel and Cu pipes For pipes with Ø 3 35 mm or 1", up to 3 mm wall thickness

Body

- · magnesium die casting
- especially light 1/3 lighter than aluminum | almost 1/2 lighter than zinc diecast | 200 g lighter than 633-70/35 yet as strong as zinc die-cast
- · best strength/weight ratio of any metal
- easily 100 % recyclable
- modern material, increasingly also used in automotive engineering
- powdercoated (not smoothly painted), thus better feel/grip for dirty (oily, greasy)/sweaty hands

Guide rollers

- needle bearing | 2 needle bearings per roller stainless steel rollers
- no more recess for cutting close to the flange, thus optimal guiding of the lnox tube

Fast running spindle

- · extra strong
- zinc die casting
- high dimensional accuracy
- · high surface quality (low roughness)
- · easy to machine: high accuracy

Integrated rotary deburrer

- Noga deburrer (one of the best blade manufacturers in the world)
- removable, easier deburring without moving the whole RAS


Spare cutting wheel

- Art. No. 633-75A
- size: 19 x 5 mm
- Additional spare wheel in the handle!
- change without additional tool Handle
- zinc die casting
- easy to bring the wheel to the tube due to the heavier zinc diecast swing whandle

🕨 in

Cutting wheel with needle bearing







Art. no. 633-71/35

Pipe Ø 3 - 35 mm

G

haupa.com

Cutting wheel | Stainless steel, carbon steel, copper

- · replacement cutting wheel with needle bearing
- suitable for stainless steel, carbon steel, copper
- suitable for: Art. no. 633-71/35
- Outer Ø 19 mm
- Inner Ø 5 mm
- Thickness 5 mm



Ratchet cut | stainless steel, carbon steel

Problem-solver for pipes that are already installed

- specially for cutting stainless steel, carbon steel and copper pipe, Ø 8 – 28 mm
- the fine ratchet functions makes it easy to cut the pipes
- · easy to adjust the spindle
- · replacement cutting wheel Art. no. 622-1



BRINKO 622/28

Cutting wheel | Stainless steel, carbon steel, copper

22/1-22

- replacement cutting wheel suitable for stainless steel and carbon steel
- suitable for: Art. no. 622/28
- Outer Ø 19 mm
- Inner Ø 6 mm
- Thickness 3 mm



=][[p]=

Pipe cutter with deburrer for stainless steel, copper and brass pipes, plastic and composite pipes

With extra strong fast running spindle

- · 4-roller guide with groove for beading
- · integrated rotation deburrer
- 1 cutting wheel for stainless steel, copper and brass pipes, Art. no. 632-1
- 1 cutting wheel for plastic and composite pipes, Art. no. 633-1 (only integrated in the handle of Art. no. 633/35)



Combination pipe cutter with deburrer

For pipes Ø 6 - 76 mm, 1/4 - 3"

for copper and brass pipes, plastic - two cutting wheels · rapid spindle adjustment

- 1 cutting wheel for plastic and composite pipe, Art. no. 627-1
- 1 cutting wheel for stainless steel, copper, brass and hard plastic pipe (up to 2 mm), Art. no. 627-2



BRINKO 633/35

Art. no. 633/35

Pipe Ø 3 - 32 mm

Art. no. 633/45

Pipe Ø 9 - 45 mm

BRINKO 627



INOX pipe cutter Plus with deburring unit

Special pipe cutter for INOX pipes Ø 6 - 76 mm, 1/4 - 3"

fast feeder system

Integrated rotation deburring unit

- Noga deburring unit (one of the world's best manufacturers of blades)
- detachable, easy deburring without having to move the entire RAS

Guide rolls

- 4 guide rolls made of INOX steel for optimum hold of the pipe
- guide rolls with needle bearings | 2 needle bearings per roll stainless steel rolls
- no more prior puncturing for cuts close to the seam, this allows optimum guidance of the Inox pipe

Cutting wheel

- · fast exchange of cutting wheels without tools
- cutting wheel with needle bearings for INOX, Art. No. 627-71
- size: 19 x 6,2 mm
- extra spare wheel in the handle !!!

Cutting wheel | Stainless steel

- · replacement cutting wheel suitable for stainless steel
- suitable for: Art. no. 627-70
- Outer Ø 19 mm
- Inner Ø 5 mm
- Thickness 5 mm



Art. no. 627-70 Pipe Ø 6 – 76 mm



2 | | | D)

Plastic pipe scissors

For one-hand operation with automatic blade retraction

- for Ø 6 35 mm
- for separating hard and soft plastic pipes, cable ducts, fibre-reinforced plastic and rubber hoses, pipes made of composite material and polypropylene
- · little strength required due to ratchet technology
- straight and distortion-free, right angles cuts
- · no problem blade change



(

Pipe deburrer

- for internal and external deburring of stainless steel, brass, aluminium and plastic pipes
- robust quality tool: stiff aluminium housing and very fine deburrer blade

Art. no. 648/35	Art. no. 648/54
Pipe Ø 8 – 35 mm	Pipe Ø 10 - 54 mm
	AND AND AND AND AND
and the second second	Aurio 1
and the state	and the state of the
	and the first
	- And And

0

6



haupa.com

Automatic plastic tube shears

- · with lever transmission
- for tubes in PVC, PE, PD, PEX, PVDF with a wall thickness of up to 2 mm and composite tubes
- single-hand operation and recoil-free ratchet mechanism, high safety standard
- durable blade made of tempered steel with a precise angle for easy cutting of plastic tubes, with V-cut
- · little power required thanks to special teeth design
- precise pinpoint cut without deformation of the tubes, wide tube base
- rubber-coated handle and powder-coating for a secure hold without slipping

×

6

- transport lock and latch
- · blade with fast retraction
- · easy blade exchange





Art. no. 635/35	Art. no. 635/42
Pipe Ø 35 mm	Pipe Ø 42 mm
and the second second	
the states of the	
	Person a series
d and the	Man Martin He
and first	
and the second	-
	A
0	
ALVANDA -	
The weather should	the state
the second and	
and the second	
ALL ALL ALL	and the second

auda

Hydraulic pipe bending set | Basic metal

Supplied in a strong plastic case:

- 1 hydraulic hand pipe bending tool
- 5 bending segments, die-cast aluminium, 10, 12, 15, 18, 22 mm 3 dollies
- for soft copper pipes, coated copper and soft steel pipes Ø 10 22 mm
- for stainless steel pipes Ø 10 15 mm
- bends up to 90°
- bending radius 4x diameter
- to refill the oil, please use "Shell Morlina S2 BL 10" (formerly "Shell Tellus C 10")

	2
Art. no. 637	
9 pieces	_
A CONTRACTOR	Contraction of the second



Art. no. 637-10 Hydraulic pipe bending set | Combined 15 pieces Supplied in a strong plastic case: 1 hydraulic hand pipe bending tool 9 bending segments, aluminium pressure die-casting, 10, 12, 15, 16, 18, 20, 22, 26, 32 mm 5 dollys • for soft copper pipes, sheathed copper and soft steel pipes Ø 10 - 22 mm • for stainless steel pipes Ø 10 - 15 mm • for composite pipes Ø 12 - 32 mm bends up to 90° • bending radius 4 x diameter • to refill the oil, please use "Shell Morlina S2 BL 10" (formerly "Shell Tellus C 10")

HD-Hand Inspection Camara "BRIcamS"

- 5 inch LCD HD high resolution screen for real time display
- High-quality CMOS sensor (camera) with a resolution of 1280 x 720 pixels (camera head Ø 8 mm)
- HD resolution screen with 1920 x 1080 and 1280 x 720 options

Art. no. 3780

5-Inch-LCD-HD

- · Photo and video recording to Micro SD-card
- Triple LED brightness adjustment of camera light and screen illumination
- · 1 meter swan-neck camera with IP67 waterproofing
- 4000 mAh, 3.7 volt lithium-ion battery provides up to 5 hours of standby time
- Supports seven languages: English, French, German, Spanish, Italian, Japanese, Chinese

Content:

- Screen Unit
- 1 Meter Swan-Neck Camera with Ø 8 mm Camera Head
- User Guide
- Threading-Attachable Hook
- Threading-Attachable Magnet
- Threading-Attachable 90° Mirror
- · Charging cable USB-C to USB-A USB-A charger





haupa.com

Pipe inspection camera system "BRIcamL"

Video inspection system for visual inspection of pipes, hollow bodies and spaces as well as finding blockages or damage!

Pipe inspection camera system BRIcamL with a swivelling camera head, only 28 mm diameter and 40 m fiberglass cable, intelligent compact design combined with simple operation and easy transportation, thanks to the aluminium frame.

This waterproof system is complete with transmitter module can be used between and can be detected, tracked and located by locating devices, operating at 512 Hz. The camera head of the BRIcamL can be rotated 360° and swiveled by 210° and enables an exact Driving through connections and checking pipe branches. The display unit is surrounded by a robust, waterproof and airtight plastic case and can be used in cramped working conditions or for better transport of the sperated push cable unit. On the 10" TFT monitor with a Resolution of 800 x 600 pixels the smallest Defects will be recocnized and the number of meters inserted are shown. The BRIcamL is equipped with a multifunctional Control panel with OWERTY keyboard for entering text, as also an integrated microphone for voice recording during video recording on SD card or USB stick. This intelligent system even has a device for cleaning the fibre cable after use by pushing it back, which removes adhering water and impurities. These are collected in the waterproof body, which can then be emptied outdoors.

By unscrewing the transmitter unit and inserting an optional adapter, bends from DN50 upwards are possible. This system can also be operated with a 10 or 20 meter long hand reel with a \emptyset 12 mm camera head.

Content:

- 360°/210° rotating/swivelling camera head Ø 28 mm
- Camera cable: Ø 7mm/40 metres long
- · Steel coil, Meter counter
- · 6-pin camera connection
- · Cleaning brush
- 512 Hz sender
- IP68 Multifunctional control device in the IP66 case, 10" TFT monitor with USB/SD recording
- · Text and voice input using the QWERTZ keyboard
- · Control buttons for swivelling camera head
- · Operated with 6600 mAh Li-Ion battery or current
- · Mains adapter, Guide ball and star for camera head
- Video cable 1 metres 6-pin, Remote operation



Art. no. 3741

DN70 - DN160





Pressure testing pump

- · for safe tightness testing on water pipes
- brass piston, 1/2" hose connection
- · test pressure up to 60 bar
- storage tank 12 l, painted red
- tank dimensions 500 x 180 x 140 mm
- replacement manometer Art. no. 7640-1
- replacement pressure hose Art. no. 7640-2

Pressure testing pump stainless steel

- · for safe tightness testing on pipes
- in particular with chemically contaminated, aggressive liquids
- · also suitable for solar panel systems and underfloor heating
- systems
- 1/2" hose connection
- · test pressure up to 60 bar
- storage tank 12 I made of STAINLESS STEEL
- per stroke 0.027 litres
- tank dimensions 500 x 190 x 140 mm
- · replacement manometer Art. no. 7641-1
- replacement pressure hose Art. no. 7640-2



haupa.com

Art. no. 7640

BRINKO

Art. no. 7641

BRINKO

60 bar

60 bar

Pipe cleaning pump

- Suction and pressure cleaner for blocked pipes
- short attachment for washbasins and sinks
- long attachment for WC



CAUNINO

161195

Water pressure drain cleaner

Ingeniously removes blockages in drainpipes with high pressure water


Art. no. 3730/1

Pipe Ø 40 - 80 mm

Art. no. 3730/2

Pipe Ø 80 - 150 mm

- for pipes Ø 40 150 mm
- including 1.5 m hose with adaptor, hose connection $1/2^{\prime\prime}$ x $3/4^{\prime\prime}$ IG
- patented pressure balloon






ha

Sealing balloon

- · easily seal pipes
- · pneumatic sealing system for various pipe diameters
- · insert, inflate, work
- suitable for compressed air hose Art. No. 3800-2 and to the air pump with manometer Art. No. 3800-3











Compressed air hose

• extension hose for sealing bubbles

9

- · can be extended as required
- length 3 m




Plug for inner pipe

Mechanical pipe sealing system for inner pipe

- ideal for sealing drain pipes and for long-term applications
- · easy to insert and secure due to extra large wing nut
- · resistant to use and waste water
- suitable for all types of pipest
- · maximum counterpressure: 1.2 bar or 12 m
- Housing made of glass-fibre reinforced ABS plastic
- · sealing ring based on natural rubber
- · Galvanised threaded screw and wing nut corrosion-resistant

Original Gripper - tested and proven, the most preferred mechanical shut-off discs on the market

Maximum Counter Pressure 1,2 bar corresponds to a 12 m water column



		A Share & Martin and A
	Art. no. 3806/1	Art. no. 3806/2
	Pipe Ø 96 - 103 mm	Pipe Ø 147 - 154 mm
	Pipe Ø 96 - 103 mm	Pipe Ø 147 - 154 mm
	and the same state	A CONTRACTOR OF THE OWNER OWNE
2503		
3368		
2933		A CARLER OF
	Art. no. 3806/3	
	Pipe Ø 196 – 204 mm	and the second
24		Sala Andrea
	A AND AND A	
100	and the state the	
1	State of the state of the	and the second sec
122	i har i har i har i	the start and
1.23		approved the second
	- CARE - CARE	
	for a second for	Part to the
	the state and	C. F. S. M. S.
		and the second of the
	1 the start of the start	merry a stand
-	in the state	and and the contraction of the
	tore a second	
	E man there	
-		
	and the second of the second sec	A. A. A. A.
3.00	the the the	and the second second
	in the state	
		and the spin



haupa.com

Plug for end pipe


Mechanical pipe sealing system for end pipe

- · ideal for sealing drain pipes and for long-term applications
- · easy to insert and secure due to extra large wing nut
- · resistant to use and waste water
- suitable for all types of pipest
- maximum counterpressure: 1.2 bar or 12 m
- Housing made of glass-fibre reinforced ABS plastic
- sealing ring based on natural rubber
- · Galvanised threaded screw and wing nut corrosion-resistant

Original Gripper - tested and proven, the most preferred mechanical shut-off discs on the market

Maximum Counter Pressure 1,2 bar corresponds to a 12 m water column

(JOOMM) GRIPPED.





=]|||p}:


Glass tile drill

Single Drill

- · optimally designed for cordless power tools
- 1/4" hexagonal shaft
- pointed chisel edge enables precision drilling, can be re-shar-pened
- shaft diameter 6.35 mm

Please note: Only use in rotation (low rotation speed) and in sufficiently cool.

Areas: ceramics, tiles, hard-fired tiles, glass, acrylic glass, mirror glass





Glass tile drill set

- 5 piece
- Sizes: 2 x 6, 2 x 8.1 x 10 mm
- · optimally designed for cordless power tools
- 1/4" hexagonal shaft
- pointed chisel edge enables precision drilling, can be re-shar-pened
- shaft diameter 6.35 mm

Please note: Only use in rotation (low rotation speed) and in sufficiently cool.

Areas: ceramics, tiles, hard-fired tiles, glass, acrylic glass, mirror glass



Art. no. 1368

5 pieces



haupa.com

Art. no. 1381-1/6 Art. no. 1381-1/8 DIAMOND core drills "BRIdiamondDrill" Ø 8 mm Ø 6 mm Drilling without a centring aid connector M14 to be used with the angle grinder · hi-grade diamond grains for fast working, provide clean results · perfectly suited for drilling clean holes in granite and stone Art. no. 1381-1/12 Art. no. 1381-1/10 slabs, porcelain, ceramics and tiles Ø 10 mm Ø 12 mm · extremely long service life thanks to high speeds (recommended: 8,000 - 14,000 rpm) · special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled Art. no. 1381-1/14 Ø 14 mm $\odot \bigcirc \bigcirc \checkmark$

Art. no. 1381

7 pieces

DIAMOND core drills set "BRIdiamondDrill"

Drilling without a centring aid 7-pieces: Ø 2 x 6, 2 x 8, 10, 12, 14 mm

- connector M14 to be used with the angle grinder
- hi-grade diamond grains for fast working, provide clean results
- perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- extremely long service life thanks to high speeds (recommended: 8,000 – 14,000 rpm)
- special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled



Art. no. 1381-7

7 pieces

Drilling without a centring aid

- 7 pieces: Ø 3 x 6, 3 x 8, 10 mm
- · connector M14 to be used with the angle grinder
- hi-grade diamond grains for fast working, provide clean results
- perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- extremely long service life thanks to high speeds (recommended: 8,000 14,000 rpm)
- special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled





👎 🖸 🕨 in

haupa.com

Drilling without a centring aid

- 7 pieces: Ø 2 x 6, 8, 10, 12, 14 mm
- 1 Centering Guide stainless 5 40 mm
- connector M14 to be used with the angle grinder
- · hi-grade diamond grains for fast working, provide clean results
- perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- extremely long service life thanks to high speeds (recommended: 8,000 – 14,000 rpm)
- special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled





Art. no. 1381-6

7 pieces

=][[]»]=

Drilling without a centring aid 4 pieces: Ø 2 x 6, 8, 10 mm

- · connector M14 to be used with the angle grinder
- hi-grade diamond grains for fast working, provide clean results
- perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- extremely long service life thanks to high speeds (recommended: 8,000 – 14,000 rpm)
- special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled





Art. no. 1381-4

4 pieces



Art. no. 1379-3/6 Art. no. 1379-3/5 **DIAMOND core drills "BRIdiamondDrill"** Pipe Ø 5 mm Pipe Ø 6 mm Advantages of the DIAMOND drills: · precise positioning, minimum risk of slipping off · Safety, Fast, Efficiency & Sophisticated design · special wax filling ensure cooling, no cooling water required Art. no. 1379-3/10 Art. no. 1379-3/8 hex shank Ø 8,2 mm Pipe Ø 8 mm Pipe Ø 10 mm · wax filled core helps cooling and lubricates, need not watering • a strong bond is made through the brazing process extending service life · Diamond coated design reduces cutting heat for 5x longer working life Art. no. 1379-3/12 Reliable cutting, drilling & grinding in the following materials: Pipe Ø 12 mm · floor and wall tiles, hard porcelain · granite and marble · glass and fiberglass

BRINKO*8mm







... convincing solutions

Drilling without a centring aid 4 pieces: Ø 2 x 6, 8, 10 mm

- hi-grade diamond grains for fast working, provide clean results
- perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- extremely long service life thanks to high speeds (recommended)
- special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled





Art. no. 1379-4

4 pieces



haupa.com

Germany: HAUPA GmbH & Co. KG, Lange Str. 40, D-42857 Remscheid, Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com. Prices upon request. Errors and technical changes reserved.

Drilling without a centring aid 7 pieces: Ø 2 x 6, 8, 10, 12, 14 mm

- 1 Centering Guide stainless 5 40 mm
- hex shank Ø 8 mm
- hi-grade diamond grains for fast working, provide clean results
- perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- extremely long service life thanks to high speeds (recommended)
- special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled





Art. no. 1379-6

7 pieces

HSS-bi-metal hole saw set | Plumbing standard

For sanitary work

- supplied in unbreakable plastic case, 6 pieces:
 5 HSS-bi-metal hole saws Ø 44, 57, 68, 75, 114 mm, 4 6 tpi
 1 SDS chuck adaptor with HSS drill
- cutting depth 40 mm
- for steel, Nirosta, non-ferrous metals, HAT pipe, wood and aerated concrete
- · also ideal for switches and sockets
- all hole saws are also available individually Art. no. 1380





Germany: HAUPA GmbH & Co. KG, Lange Str. 40, D-42857 Remscheid, Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com. Prices upon request. Errors and technical changes reserved.

BRINKO

Double-hole punch

To securely fasten mixer taps and spigot taps in kitchen sinks and other sheet materials, precise and accurately sized mounting holes are required.

With the double-hole punch, mounting holes in the most commonly requested sizes \emptyset 32 mm and \emptyset 35 mm can be created cleanly and without contamination.

The double-hole punch is suitable for the following thicknesses:

- · Iron, steel, copper, and aluminium sheets up to 2 mm
- Stainless steel sinks and other stainless steel sheets up to 1.5 mm



Art. no. 914

NEW

RUNIT

35 mm

Ø 32 + 35 mm



Ø 32 mm Hole diameter

Ø 35 mm Hole diameter

auda

Deep-hole marker 2-in-1 with a sharpener

One pen - two functions

With a cap: Retractable pencil for precise marking and writing Without a cap: Deep-hole marker for drilling and installation tasks

- · very stable, with a practical clip
- · sharpener integrated into the push-button
- graphite universal refill for marking on rough and smooth surfaces
- ergonomic, triangular form
- · preserves resources and is environmentally-friendly
- · designed for various refills for almost all surfaces and materials

DRY Profi

Effective pressing mechanism for automatic lead propulsion in robust stainless steel tube

- · easy one-handed operation thanks to improved clip
- integrated sharpener with guide for fast sharpening at any time
- · leads can be replenished from the front or back
- for all surfaces (wood, metal, glass, ceramics ...)
- special graphite lead included can be wiped off smooth surfaces with a damp cloth
- · separately available coloured leads, water soluble or waterproof
- available in colour sets or individual colours for versatile use on light and dark backgrounds



BRINKO

Art. no. 2528

black | yellow

Length 150 mm

2500

ANDA



haupa.com

Universal knife

"Das Original" BRINKO cutter knife

- ergonomic 2-component handle with soft plastic
- super-sharp, double-ground blade width 18 mm, thickness 0.5 mm
- · blade feed with automatic lock
- 2 replacement blade strips in the handle
- · colour: yellow, black



Art. no. 2980

160 x 45 x 25 mm



Blade dispenser "Black Blades"

"Original" BRINKO "Black Blades" Cutter blades, 10-part, suitable for Art. no. 2980

- · super sharp blade for precise cuts
- · reinforced design
- fits all conventional cutter knives
- · dual edge for maximum sharpness
- · maximum lifespan thanks to flame hardening process

"**Original"** BRINKO "Black Blades"

- · ideal for various materials
- · blade is coated black
- · delivered in a dispenser
- · 8 segments
- 100 x 18 x 0,5 mm

10 x

Art. no. 2982 100 x 18 x 0,5 mm

-1107-



Germany: HAUPA GmbH & Co. KG, Lange Str. 40, D-42857 Remscheid, Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com. Prices upon request. Errors and technical changes reserved.

🔒 🔘 🕨 in

Soft-faced hammer with 3-component handle

Soft-faced hammer with 3-component high-safety handle and steel middle element.

Ideal for firm yet gentle hammering during installation work, alignment and attachment. White polyamide inserts are connected to the middle part by means of a dual-locking attachment system; this guarantees absolute safety at work. The inserts can be replaced and ordered separately. The high-safety handle comprises 3 components that are permanently connected to one another! The inner core is made of an aluminium alloy. A polyamide plastic (A2800) that is ultra-resistant to oils and solvents and also the non-slip rubber handle are moulded around this. **Note:** Not recoil-free!

Benefits:

- · Shock-absorbing, therefore gentle on the joints
- · Dual-locking attachment system of the polyamide inserts
- · High-safety handle is indestructible
- · The handle is permanently connected to the hammer head
- Non-slip handle allows ergonomic and safe work
- · Highest possible level of safety



BRINKO OA

Tool case "plumbing"


Hard-top case, black

- dimensions 480 x 370 x 225 mm
- · alu frame
- non-slip carrying handle
- · 2 locks
- · with shoulder strap
- reinforced metal corners as additional protection against damage

Inside:

- · 2 tool kits completely removable
- · document pocket
- bottom half of case equipped with variable partitions







haupa.com

Germany: HAUPA GmbH & Co. KG, Lange Str. 40, D-42857 Remscheid, Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com. Prices upon request. Errors and technical changes reserved. 6,50 kg

"Skater" tool trolley

Hardshell case made of PP plastic, black

- inside dimensions 470 x 360 x 220 mm
- · extremely robust design, shell highly impact resistant and almost indestructible
- · rigid frame made of hardened aluminium
- 3 sturdy back hinges, sturdy lid holders riveted 4 times
- · case corners additionally reinforced with aluminium attachments
- · ergonomic telescopic handle
- · integrated trolley system with ball bearing skate wheels
- · lockable locks and additional combination lock
- · removable compartment dividers in the case bottom with cover
- · 3 tool plates and document compartment







INSENSITIPU


CORROSION FIRMLY

SHOCKRESISTANT BIKES







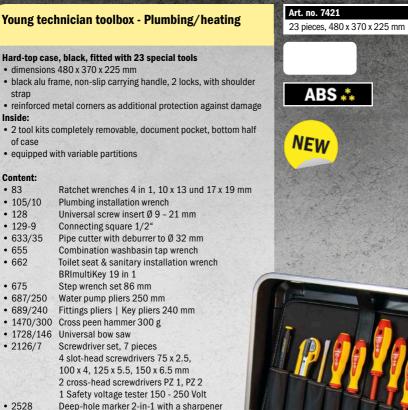

Universal knife for cutter blades 18 mm

Electrician's chisel 200 x 12 mm

- 2980 • 180094





11,00 kg

Apprentice case "BRIbasic"

Hard case, black, fitted with 14 special tools

2 tool boards and document pocket completely removable, lockable, incl. 2 keys, bottom tray with variable dividers made of aluminum, reinforced metal corners as additional protection against damage, Tool case empty, Art. no. 220030

Content:

- Screwdriver set 6 pieces, Art. no. 2122
 4 slot-head screwdrivers 80 x 3, 100 x 4, 125 x 5.5, 150 x 6.5 mm
- $2\ \text{cross-head}$ screwdrivers PZ 1, PZ 2
- Water pump pliers 240 mm, Art. no. 680/240
- Cross peen hammer 300 g, Art. no. 1470/300
- Pipe cutter, Art. no. 633/35
- Universal knife, Art. no. 2980
- Plumbing installation wrench, Art. Nr. 105/10
- · Universal bow saws, Art. no. 1728/146
- Hex key set, 7 pieces, 2.5, 3, 4, 5, 6, 8, 10 mm, Art. no. 111/2
- · Spirit level, Art. no. 2839
- Tool case empty, Art. no. 220030




Art. no. 7416

14 pieces, 460 x 350 x 180 mm

ABS 👬

👎 🖸 🕨 in

haupa.com

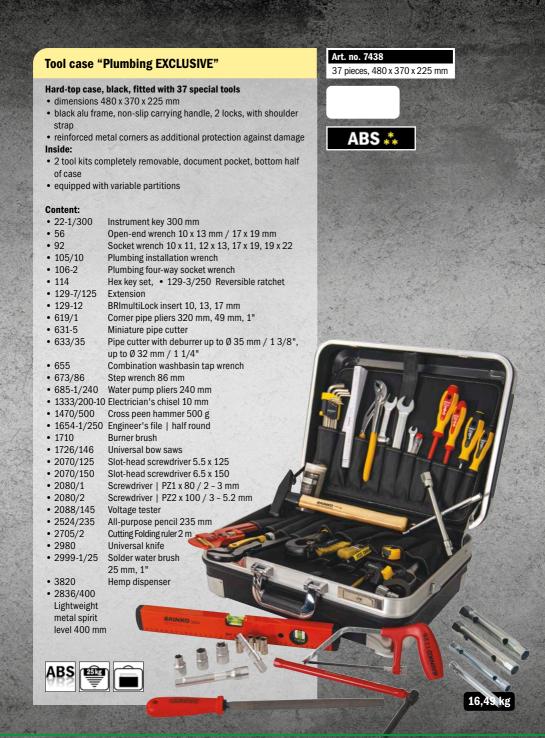

Cordless Pressing Tool AC0103 BT | 4.0 Ah

Comfort Line AC0102 - compact and powerful efficiency – NEW WITH BLUETOOTH

Supplied in case:

cordless pressing tool, 1 battery 12 V 4.0 Ah Li-lon, 1 charger storage space for up to 6 press jaws PB1

- Data transfer via Bluetooth®
- for press connections 12 35 mm metal, 16 40 mm plastic
- · automatic pressing process, bolt retention
- particularly suitable for tight pressing space and installation situations
- real single-handed operation: 1.7 kg light, 32 cm long (without press jaw), ergonomic shape
- LED display with electronic display: pressing force monitoring, battery charge monitoring, error messages
- output: 240 W, piston force: 19 kN, piston stroke: 30 mm
- battery: 12 V Li-Ion 4.0 Ah, battery capacity: 40 180 pressings, charging time: approx. 30 – 60 min
- compatible with novopress PB1 press jaws Art. no. 625-20 to -25





5,26 kg

Art. no. 625-1PM/AC0103

Pipe Ø 12 - 40 mm



Germany: HAUPA GmbH & Co. KG, Lange Str. 40, D-42857 Remscheid, Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com. Prices upon request. Errors and technical changes reserved.

Cordless Pressing Tool AC0203 BT | 5.0 Ah

Comfort Line ACO203 - a new generation of pressing technology – NEW WITH BLUETOOTH

Supplied in case:

cordless pressing unit, 1 rechargeable battery 18 V 5.0 Ah Li-Ion, 1 charger, storage space for up to 6 press jaws PB2

- Data transfer via Bluetooth®
- for press connections 12 54 (108) mm metal, 16 110 mm plastic
- fits securely in your hand: 2.8 kg, 39 cm long (without press jaw), ergonomic shape
- Features: pressing area illumination, implemented force monitoring and diagnosis function, innovative brushless motor technology for faster pressing process and more pressings per battery charge
- output: 450 W, piston force: 32 kN, piston stroke: 40 mm
- rechargeable battery: 18 V Li-Ion 5.0 Ah,battery capacity: up to 250 pressing processes, charging time: 60 min
- compatible with novopress PB2 press jaws Art. no. 625-30 to -35 and novopress PS2 press collars Art. no. 625-40 to -45





Art. no. 625-5PM/AC0203

Pipe Ø 12 - 110 mm

=]|||p}:

V-Press jaw set

Press jaws also wear out during use. Replacing them guarantees the safety of the pressing process and safeguards the worker by using suitable press jaws.

BRINKO offers the most commonly used sizes V15, V22, V28, and V35 in a specially equipped BRINKO box with the V-Press jaw set. The BRINKO box has 2 additional slots where intermediate sizes like V12 and V18 can be stored, as well as a compartment for additional equipment such as pipe cutters or deburrers.

Contents:

V-Press jaws V15, V22, V28, and V35



NEW



haupa.com

Germany: HAUPA GmbH & Co. KG, Lange Str. 40, D-42857 Remscheid, Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com. Prices upon request. Errors and technical changes reserved.

M-Press jaw set

Press jaws also wear out during use. Replacing them guarantees the safety of the pressing process and safeguards the worker by using suitable press jaws.

BRINKO offers the most commonly used sizes M15, M22, M28, and M35 in a specially equipped BRINKO box with the M-Press jaw set. The BRINKO box has 2 additional slots where intermediate sizes like M12 and M18 can be stored, as well as a compartment for additional equipment such as pipe cutters or deburrers.

Contents:

M-Press jaws M15, M22, M28, and M35



4 pieces

NEW

Suction Cup

Guaranteed the right Suction Cup for your application with the highest degree of security

- plastic body, 2x suction disc Ø 120 mm
- load-bearing capacity: up to max. <► 80 kg, \$ 40 kg
- guideline value use under the specified value recommended
- · handle is covered with non-slip rubber

Can be used on all materials with smooth, sealed surfaces (e.g. panes of glass, tiles, stone, sheet steel, panels made of coated wood) Safety information:

- the surface of the object and the suction discs must not be greasy
- before lifting a weight, carry out a test
- · never walk under the load and never lift above yourself or others



Tension cable | 8 mm, length 1 m

- Rubber tension cable 8 mm thick and 100 cm long
- · latex core
- with two rubberised universal wire hooks
- approved lashing capacity: 70 N ~ 7.1 kg



Art. no. 1180

0.39 kN



Germany: HAUPA GmbH & Co. KG, Lange Str. 40, D-42857 Remscheid, Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com. Prices upon request. Errors and technical changes reserved.

Breathable protective gloves

- Nitrile coating, pimpled
- · extremely grippy due to high abrasion resistance
- · very comfortable to wear, hands remain cool and dry




Nork gloves "I	BRIGecko"
----------------	-----------

- · Premium quality
- 100 % polyamide, finely knitted
- · latex-coated glove palm
- · repels liquid

· excellent fit





Art. no. 3454/9

Art. no. 3454/11 Size 11

Size 9

Art. no. 3454/10

Size 10