EN

Special offer

International

Special net price offer 2018

haupa®

Allround soft-grip scissors VDE

Art. no. 200191
50 mm²

The new allround Soft - Grip scissors with its relatively short blades and special handles are designed to fulfil the needs of the professional electrical installers. The impressive cutting performance and the tough construction make this new scissors a special tool.

- ergonomic design (2 component)
- slipping free handle - Soft - Grip
- high cutting performance by low cutting force
- precision toothing
- cable stripping device
- stainless

1000 V IEC 60900:2012

Kabelschneider

Art. no. 201085
16 mm² / Ø 8 mm

- for cutting copper/aluminium cables, fine wire, multiple-core and solid copper
- Chrome vanadium steel, dip-insulated handles
- insulating function in upper head area
- Cable measuring function thanks to the 180 degree crossover of the legs
- not for solid conductors
- Data, telephone and control cable, maximum Ø 8 mm
- Cu single wire, maximum 16 mm²
- Cu fine wire, maximum 16 mm²
- Cu multi-wire, maximum 16 mm²
- Al single wire, maximum 16 mm²
- Al multi-wire, maximum Ø 8 mm = 16 mm²

Ø 8 | Cu AL | Cu

Cable cutter

Art. no. 201087
35 mm² / Ø 12 mm

- for cutting copper/aluminium cables, fine wire, multiple-core and solid copper
- Chrome vanadium steel, dip-insulated handles
- insulating function in upper head area
- Cable measuring function thanks to the 180 degree crossover of the legs
- not for solid conductors
- Data, telephone and control cable, maximum Ø 12 mm
- Cu single wire, maximum 16 mm²
- Cu fine wire, maximum 35 mm²
- Cu multi-wire, maximum 25 mm²
- Al single wire, maximum 25 mm²
- Al multi-wire, maximum Ø 8 mm = 25 mm²

Ø 12 | Cu

Cable cutter with a snap

Art. no. 201000
120 mm² / Ø 18,9 mm

- one-handed cable cutters for fine wire cables only
- two-stage adjustment mechanism (patent)
- Low force required
- Laser-cut components
- CNC-ground cutting
- inductively hardened blades
- adjustable screw joint
- Telephone cable maximum Ø 26.1 mm
- Cu fine wire cable, maximum Ø 18.9 mm = 120 mm²

Video 201000

Ø 18,9 | Cu AL

Hand cable cutter

Art. no. 200089
Ø 32 mm

- for copper and alu cable
- ratchet action type

Ø 32 | Cu AL

Hand cable cutter

Art. no. 200183
Ø 52 mm

- for copper and alu cable
- ratchet action type

Video 200183

Ø 52 | Cu AL

Ratchet two handed cable cutter „SCAR45“ for SWA cable

Art. no. 200199
Ø 45 mm, SWA

Cutting capacity: Steel reinforced Cu-Al cables up to Ø 45 mm maximum, length: 430 mm, weight: 1,7 kg

- Easy cutting due to the combination of ratchet transmission and long handles
- Impact resistant coated and hardened handles
- Surface-grinded blades made up of high-coated steel
- Blades releasable at any point during cutting
- All parts replaceable

Ø 45 | Cu AL | SWA

Cable stripper „Kabifix“

Art. no. 200022
6 - 28 mm²

- For cutting opening and stripping cables from Ø 6 - 25 mm
- Longitudinal and round cut (swivel lever)
- Ø 6 – 28 mm • NYY 4 – 16 mm² • NYM 5 – 16 mm²
- Coaxial and bell round cable
- Isoflex and PVC piping maximum Ø 25 mm
- Interior adjustment screw for adjusting the cutting depth
- Exchangeable blades

Cable stripping knive

Art. no. 200031
8 - 28 mm²

- For removing the sleeve from all current round cables
- Blades, titanium nitride coated, thanks to the higher cutting speed
- Lower wear, increased durability
- Cutting depth can be adjusted using the setting screw on the end of the handle
- Automatic adjustment to round and lengthwise cuts
- Handle security thanks to soft component insert on the bar and handle
- Titanium nitride coated replacement blade in the housing
- Housing made from high-quality, hard wearing polyamide
- With titanium nitride coated hook blade
- TÜV / GS tested

Video 200031

Battery powered cable cutter „AS-52“

Art. no. 216434
Ø 52 mm

- for copper and aluminium cable, multi wire
- diameter up to 52 mm

Scope of delivery:
1 cutting tool, 1 quick charger,
1 battery 18 V Li-Ion, 4 Ah, in plastic case

Ø 52 | Cu AL | Li-ION 18V 4Ah

Stripper „All-rounder“

Art. no. 200050
4 - 15 mm²

- Cable stripper for round cables from Ø 4 - 15 mm and flat cables up to 15 mm width
- Stripping 1.5 - 2.5 mm² single wire
- Lengthwise cut

Video 200050

Battery powered cable cutter „AS-52ACSR“

Art. no. 216436
Ø 18,6 mm, ACSR

- Diameter 18,6 mm / 120 mm²
- ACSR 19 mm steel cables
- not suitable for Cu/Al

Scope of delivery:
1 cutting tool, 1 quick charger,
1 battery 18 V Li-Ion, 4 Ah, in a plastic case

Video 216436

Ø 18,6 | AL Fe | Li-ION 18V 4Ah

haupa®
...convincing solutions

Universal stripper

Art. no. 200043
0,2 - 4,0 mm²

- Stripper for removing the sleeve from all current round cables Ø 8 to 13 mm
- Removing the insulation on various cable types, e.g. NYM 3 x 1.5 mm² to 5 x 2.5 mm²
- Contoured blades for stripping wires 0.2-0.3-0.8-1.5-2.5-4.0 mm²
- Ideal for working in distribution and junction boxes
- Longer cable lengths can be stripped using the lengthwise cutting mechanism
- Safe hold thanks to the inclusion of anti-slip handle zones
- No need to set blades required to cutting depth
- Additional titanium nitride coated retractable blade
- TÜV / GS tested

Video 200043

Automatic cable stripper

Art. no. 211934
Ø 0,03 - 10

- for stripping fine wires and solid cables 0,03 – 10 mm²
- automatic setting to the cross-section
- integrated side cutter of up to 6 mm²
- With stripping lengthwise stop

Automatic cable stripper

Art. no. 211930
0,08 - 6 mm²

- for stripping fine wires and solid cables 0.08 – 6 mm²
- automatic setting to the cross-section
- integrated side cutter of up to 6 mm²
- With stripping lengthwise stop

Automatic wire stripper Super Plus

Art. no. 210695
0,2 - 6,0 mm²

for solid and flexible conductors and strands between 0.2 and 6.0 mm² (AWG 24 - 10)

- For fast and precise stripping even of difficult – to-access places
- No adjustment to wire cross section necessary
- Suitable for cables with insulation made from PVC and other materials
- Special scanning system, therefore no damage to conductors
- Adjustable longitudinal stop from 6.0 to 15.0 mm for even serial stripping
- External side cutters for conductors up to 2.5 mm²
- Body of pliers made from fibre-glass reinforced polyamide
- Handle of pliers with elongated hole at the bottom for mounting
- TÜV / GS tested

Video 210965

Automatic cable stripper

Art. no. 211928
0,08 - 2,5 mm²

- For stripping fine wires and solid cables 0.08 – 2.5 mm²
- Stripping length, maximum 15 mm
- Automatic setting to the cross-section
- Integrated side cutter of up to 6 mm²
- With stripping lengthwise stop

Crimping pliers for end sleeves

Art. no. 211816
0,08 – 16 mm²

Art. no. 211818
0,08 – 10 mm²

precise crimping profile, automatic setting to the conductor crosssection, unlockable forced lock, guarantees connections that meet DIN, high transmission and ergonomically shaped plastic handles for fatigue free working.

211816 square pressing 0,08 – 16 mm²

211818 hexagon pressing 0,08 – 10 mm²

Front-Crimping pliers

Art. no. 211810
0,08 – 16 mm²

for end sleeves, precise square pressing profile, automatic adjustment on wire diameter, frontal approach allows working in small areas, sidewise approach for end sleeves up to 2.5 mm², with locking device, high transmission and ergonomically formed plastic handle, **square pressing**

Crimpset X-Crimp

Art. no. 211692
Including nylon bag

Crimping pliers used to quickly change HAUPA precision pressing inserts. Supplied in robust nylon bag (article 220260).

- Reliable crimping results just like with fixed pressing inserts
- Forced lock ensures standardised pressing actions
- Flat construction enables you to work precisely even when space is at a premium

Content:

Art. 211690

Art. 210763/E	0,5 – 4 mm²	M 210
Art. 210765/E	6 – 16 mm²	M 210
Art. 210764/E	1 – 10 mm²	M 210
Art. 210761/E	0,5–6 mm²	M 210

Video 211692

Smart Battery powered crimping tool „SDE 240-6M“

Sensor

Art. no. 216669/M
10 - 240 mm²

Crimping head 180° swivelling, manual return flow after perfect pressure, mandrel shape pressing.

Extent of supply:
1 crimping tool,
1 charger,
1 battery,
1 strap,
in SysCon stacking box „SysCon M“ art. 220372 without inserts.

Technical data:
- Pressing force in kN: 60 kN
- Working pressure in bar: 700
- Pressing time, battery-operated in seconds: ca. 5
- Battery charging time in minutes: 30
- Battery type: Li-Ion, 18 V, 2 Ah
- Cable lugs: standard Cu 10-240
- Connectors: standard Cu 10-240
- Dimensions: 383 x 75 mm
- Weight in kg: 3,3
- Weight of set in kg: 7,4

With the different colours of the sensor LED, it shows whether the pressing has been completed successfully or which errors have occurred:
- Light is green: Pressing completed as standard, motor stopped.
- Light is orange: Battery voltage not sufficient
- Light is red: Pressing interrupted before completed

The device also has 1 white LED designed to illuminate the working area.

Video 216669/M

Sensor technology

10-240 standard | 10-240 standard | DIN 46234 | Sensor

60 kN | 700 bar | 360° | 30 min. | Li-ION 18V 2Ah | SysCon

haupa
...convincing solutions

Smart Battery powered crimping tool „SO-6“

SysCon

Art. no. 216801
6 - 300 mm²

Hydraulic for interchangeable dies, crimping head 180° swivelling, Head can be opened, manual return flow after perfect pressure.

Extent of supply:
1 crimping tool,
1 charger,
1 battery,
1 strap,
in SysCon stacking box „SysCon M“ art. 220372 without inserts.

Technical data:
- Pressing force in kN: 60 kN
- Working pressure in bar: 700
- Head can be opened yes
- Opening/ Hub: 17 mm
- Pressing width: slim
- Pressing time, battery-operated in seconds: ca. 5
- Battery charging time in minutes: 30
- Battery type: Li-Ion, 18 V, 2 Ah
- Cable lugs: standard Cu 6-300
  DIN Cu 6-300 • DIN Al 16-240
- Connectors: Cu 6-300
  DIN Cu 6-300 • DIN Al 16-240
- Dimensions: 383 x 75 mm
- Weight in kg: 3,0
- Weight of set in kg: 7,1

Video 216801

300-06



Smart Battery powered crimping tool „SO-6M“

Sensor

Art. no. 216801/M
6 - 300 mm²

Technical data and scope of delivery, see 216801.

With the different colours of the sensor LED, it shows whether the pressing has been completed successfully or which errors have occurred:
- Light is green: Pressing completed as standard, motor stopped.
- Light is orange: Battery voltage not sufficient
- Light is red: Pressing interrupted before completed

The device also has 1 white LED designed to illuminate the working area.

Video 216801/M

Sensor technology

300-06



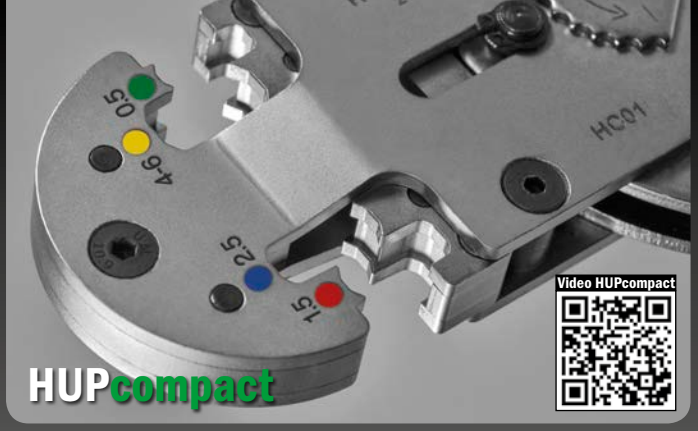

Video HUPcompact

HUPcompact

- **100% parallel crimp • precision crimp**
- **handle force: 5 kN • small compact construction**
- **life span: 50,000 crimp cycles**

HUPcompact „HC01“

Art. no. 213090
Ø 0,1 - 6

- for insulated cable lugs and connectors
- **oval pressing**

HUPcompact „HC02“

Art. no. 213088
Ø 0,25 - 16

- for end sleeves
- **trapezoidal pressing**
- (10 + 16 mm² wave profile/ 0.5-6 mm² trapezoidal profile)

HUPcompact „HC03“

Art. no. 213092
Ø 0,75 - 10

- for non insulated cable lugs and connectors
- **mandrel shape pressing**

HUPcompact „HC04“

Art. no. 213094
Ø 0,5 - 6

- for open brass tab connectors
- with locator
- **roll pressing**

Tool frame „HUPstar" – open

Art. no. 213078
open

Tool frame without star crimp, open design for all of the following pressing stars, specifically for connectors

„HUPstar"

Art. no. 213086
open

Tool frame including the star crimps below, open design especially for connectors

Dies for HUPstar

Art. no. 213086/E
Dies

End sleeves 0.5 – 10 mm²
Insulated cable lugs 0.1 – 6 mm²
Ring cable lugs (DIN 46234 / DIN 46341) 0.25 – 10 mm²

„HUPstar"

Art. no. 213080
open

Tool frame including the star crimps below, open design especially for connectors

Dies for HUPstar

Art. no. 213080/E
Dies

End sleeves 0.14 - 16 mm²
Socket sleeves 0,14 – 6 mm 0.14 - 6 mm





HUPstar „Coaxial"

Art. no. 213082
open

Tool frame including the star crimps below, open design especially for connectors

Dies for HUPstar „Coaxial"

Art. no. 213082/E
Dies

Coaxial
BNC, TNC, SNB, SNC, SMS, SMA, MCX, 1.07 – 10.9 mm



HUPstar „Photovoltaic"

Art. no. 213084
open

Tool frame including the star crimps below, open design especially for connectors

Dies for HUPstar „Photovoltaic"

Art. no. 213084/E
Dies

Photovoltaics / Solar
Amphenol Helios H4, multi-contact MC3/ MC4 2.5 - 6.0
Tyco Solarlok, 1.5 – 4.6 mm²



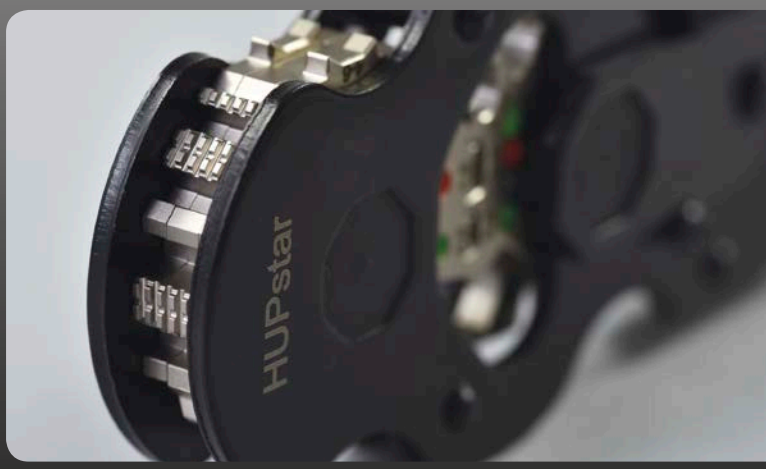

haupa®
...convincing solutions

HAUPA GmbH & Co. KG, Königstraße 165-169, D-42853 Remscheid, Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418840, E-Mail: sales@haupa.com.
Prices on request. Errors and technical changements reserved.

LWL

HUPstar „Fibre Optic Connector“

Art. no. 213098
open

Tool frame including the star crimps below, open design especially for connectors

Dies for HUPstar „Fibre Optic Connector“

Art. no. 213098/E
Dies

Fibre Optic Connector
1.69; 2.5; 3; 3.25; 3.65; 4.2; 4.52; 4.95; 5; 6.5; 10.9



automotive

Tool frame „HUPstar” – automotive

Art. no. 213100
(automotive)

Tool frame including the star crimps below, closed design for the automotive network

Automotive contacts

Hirose DF1B-2428SC UL1007
Litz wire

Hirose DF1B-2428PC UL1007
Litz wire 0.08; 0.14; 0.25

Hirose DF1B-30SC UL1007
Litz wire

Hirose DF1B-30PC UL1007
Litz wire 0.05

Hirose DF1B-2022SC
Hirose DF1B-2022PC
0.34; 0.50

HUPstar „Twisted contacts, square“

Art. no. 213102
open

Tool frame including the star crimps below, open design especially for connectors

Dies for HUPstar „Twisted contacts, square“

Art. no. 213102/E
Dies

Twisted contacts, square
0.1; 0.14; 0.25; 0.34; 0.5 1; 1.5; 2.5; 4; 6; 10
Locator for Ø 1.6; 2.5; 4

Video HUPstar

life span: 50,000 crimp cycles
100% parallel crimp

Cable pulling device HAUPA PullTec

with special plastic coating, M5 thread and probe, in durable plastic housing, colour: black

„Single Composite“

4,0 mm, green

- Breaking load: 300 kg

The advantages of the HAUPA PullTec at a glance:
- Material: Coated with a special plastic
- Slides very well and is highly elastic
- Low friction
- Does not break or bend
- M5 thread
- With probe
- In durable plastic housing

low friction

Video 143500

Art. no. 143500
TL: 20, M5, Ø 4,0

Art. no. 143502
TL: 30, M5, Ø 4,0

Cable pulling device HAUPA PullTec

with special plastic coating, M5 thread and probe, in durable plastic housing, colour: black

„Single Composite“

5,2 mm, black

- Breaking load: 350 kg

The advantages of the HAUPA PullTec at a glance:
- Material: Coated with a special plastic
- Slides very well and is highly elastic
- Low friction
- Does not break or bend
- M5 thread
- With probe
- In durable plastic housing

replaceable guiding head

does not break or bend


Breaking strength: 350 kg

low friction

Art. no. 143504
TL: 20, M5, Ø 5,2

Art. no. 143506
TL: 30, M5, Ø 5,2

Cable pulling device FOX

Cable pulling device FOX with glass fibre rod Ø 4.5 mm and green PP coating RAL 6018, with zinced steel winder Ø 330 mm, standing version, complete with front/end sleeve M5 and pulling head M5 with loop

Art. no. 143050
TL: 40, M5, Ø 4,5

Art. no. 143052
TL: 60, M5, Ø 4,5

Art. no. 143054
TL: 80, M5, Ø 4,5

Decoiler 1200

The front and the rear sides are made of anodized aluminum with antiskid ribs. For the left and the right side, sink steel with powder coating has been used. Because of this construction, the decoilers are strong, flexible to use, and resistant against heavy circumstances. The roles have bearings and a sliding axis, which make it easy to change the position of the roles without any special tools. Four antiskid buffers ensure that vibrations are subdued and floors remain intact.

Technical data:
Length: 610 mm
Width: 570 mm
Height: 115 mm

Drum/width: 560 mm
Drum-Ø: 1200 mm
Drum/kg: 175

Art. no. 143400
Weight: 9 kg

Decoiler 1200+

Technical data:
Length: 705 mm
Width: 570 mm
Height: 115 mm

Drum/width: 660 mm
Drum-Ø: 1200 mm
Drum/kg: 300

Art. no. 143402
Weight: 10,5 kg

haupa®
...convincing solutions

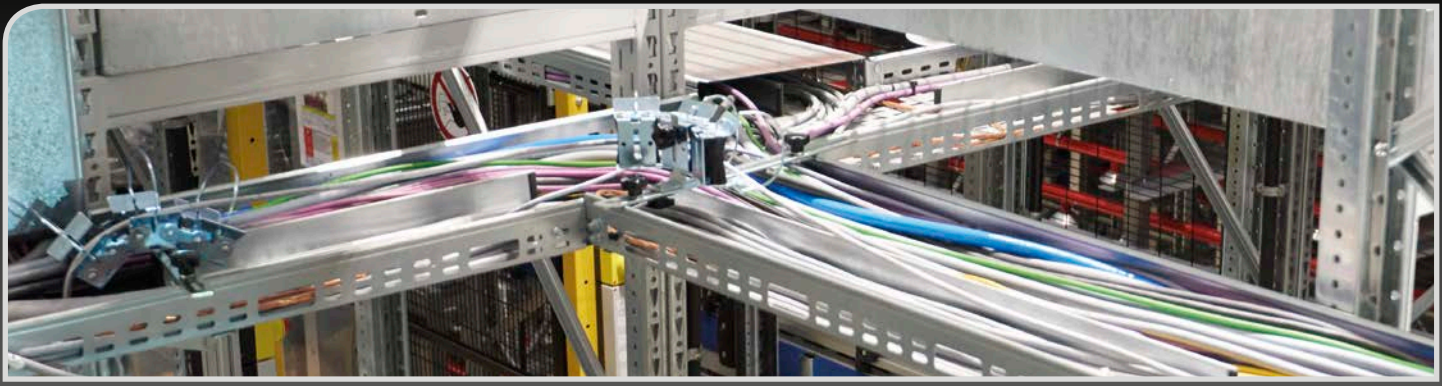

Cable pulling device „CableGo starter“

Art. no. 143420
6 pcs.

Content in plastik case:
1 x basic module „CableGo“ + 3 wire brackets
1 x table clamp „CableGo“
1 x mounting bracket „CableGo“

Cable pulling device „CableGo profi“

Art. no. 143422
14 pcs.

Content in plastik case:
3 x basic module „CableGo“ + 3 wire brackets
3 x table clamp „CableGo“
3 x mounting bracket „CableGo“
1 x connection set and several mounting parts „CableGo“

Video 143422

Cable pulling device „CableGo master“

Art. no. 143424
17 pcs.

Content in plastik case:
5 x basic module „CableGo“ + 3 wire brackets
5 x table clamp „CableGo“
5 x mounting bracket „CableGo“
1 x connection set and several mounting parts „CableGo“

SysCon cable pulling device „CableGo profi“

SysCon

Art. no. 143432
14 pcs.

Content in SysCon stacking box art. 220372:
3 x basic module „CableGo“ + 3 wire brackets
3 x table clamp „CableGo“
3 x mounting bracket „CableGo“
1 x connection set and several mounting parts „CableGo“

SysCon cable pulling device „CableGo master“

SysCon

Art. no. 143434
17 pcs.

Content in SysCon stacking box art. 220372:
5 x basic module „CableGo“ + 3 wire brackets
5 x table clamp „CableGo“
5 x mounting bracket „CableGo“
1 x connection set basic module „CableGo“

Basic module „CableGo“ + 3 wire brackets

Basic module for easy cable penetrations in corners and roundings.

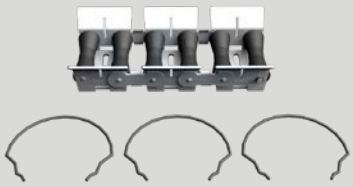

Art. no. 143440
4 pcs.

Table clamp „CableGo“

Table clamp for fixing basic modules.

Art. no. 143441
1 pcs.

Mounting bracket „CableGo“

Mounting bracket for fixing basic modules.

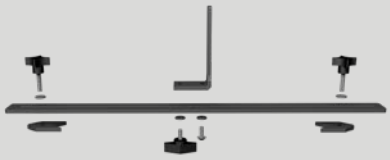

Art. no. 143442
14 pcs.

Connection set basic module „CableGo“

Connection set for connecting several basic modules.

Art. no. 143443
2 pcs.

Set 3 wire brackets „CableGo“

Wire brackets for basic modules.

Art. no. 143444
3 pcs.

Tool case „ElectroCombo“

black plastic case with metal catch, complete tool set for electricians and network technicians,
case: 490 x 375 x 100 mm

Contents:

- 2C-VDE combination pliers, 180 mm*
- 2C-VDE side cutters, 160 mm*
- 2C-VDE wire stripping pliers, 160 mm
- 2C-VDE long chain nose pliers, straight, 200 mm*
- Cable cutter 160 mm, coating-insulated
- Crimping pliers for end sleeves 0,5 - 16 mm²
- Set ball point allen keys 9-pcs., extra long
- 2C exchangeable „Vario“ handle
- „Vario“ replaceable blade – slotted blade 2.5, 3, 4, 5.5 mm
- „Vario“ replaceable blade – Phillips blade 1, 2
- „Vario“ replaceable blade – pozidrive blade 1, 2
- „Vario“ replaceable blade – pozidrive blade/slotted 1 + 2
- Voltage tester „Basic“, black
- Spanners for switch-cabinets „HUPkey“
- Utility knives
- Junior hacksaw 150 mm
- Electricians’ chisels 10 x 250 mm
- Cabinet levels 230 mm
- Measuring tape, 5 m
- Reversible ratchet 1/4“
- Engineers’ hammer, 300 g
- Extension 1/4“ 100 mm
- Sockets 1/4“ WS:
  4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- Ratchet screwdriver „FlexPlus“ for long bits
- 1/4“ Bits 50mm HEX 2, 2.5, 3, 4, 5, 6
- 1/4“ Bits 50mm PH 0, 1, 2, 3
- 1/4“ Bits 50mm PZ 0, 1, 2, 3
- 1/4“ Bist 50mm FD 3, 4, 5, 6
- 1/4“ Bits 50mm TX 10, 15, 20, 25, 30, 40
- 1/4“ Bits 50mm PZ/FL 1 + 2
- 1/4“ SQ x 1/4“ HEX adapter 50 mm
- Assortment box 160 x 115 x 40 mm

***High leverage | perfected cutting force performance** (high leverage pliers offer power saving of up to 50%)

Art. no. 104090
78 pcs.

104090 | 360°

haupa®
...convincing solutions

„VarioPro“ 1000 V replaceable blade system

VarioPro 1000V

Art. no. 102052
30 pcs.

The „VarioPro“ replaceable blade system with insulated replaceable blades, switching cabinet key is integrated into the system, VDE pliers set and voltage tester.

Content: 30 pcs.

- Slot: 0.4 x 2.5 x 100, 0.5 x 3.0 x 100, 0.6 x 3.5 x 100, 0.8 x 4.0 x 100, 1.0 x 5.5 x 100, 1.2 x 6.5 x 100
- Phillips: 0 x 100, 1 x 100, 2 x 100
- Pozidriv: 0 x 100, 1 x 100, 2 x 100
- PZ/FL 1, PZ/FL 2
- Tx: 8 x 100, 9 x 100, 10 x 100, 15 x 100, 20 x 100, 25 x 100, 30 x 100
- Square: 8 x 47
- Double-bit: 5,3 x 47
- Screw cap, additional screw cap when using as precision tool (electronics)
- 2-component exchangeable handle: 120 mm
- Voltage testers VDE/GS: 100700, 125-250 V
- VDE 2C pliers: 211200*, 211204*, 211208*, 211214

***High leverage | perfected cutting force performance** (high leverage pliers offer power saving of up to 50%)

Video 102050

1000 V IEC 60900:2012

Placeholders for torque handle

„VarioTQ“ dynamometric screw-driver with replaceable blades

VarioTQ 1000V

Art. no. 102700
Phillips, **1 - 6 Nm**

Art. no. 102700/PZ
Pozidriv, **1 - 6 Nm**

insulated replaceable blade made from molybdenum vanadium steel, hardened, blasted, with hexagonal shaft, in robust nylon bag (with belt loop and hook and loop closure)

- torque can be set using a separate key
- scale value can easily be read off
- clearly perceptible and audible signal when the set torque is achieved
- torque accuracy according to EN ISO 6789:2003

Contents: 12-pieces

- 2-component exchangeable handle (1000 V) 1 - 6 Nm
- slotted 0.4 x 2.5 / 0.5 x 3.0 / 0.8 x 4.0 / 1.0 x 5.5 / 1.2 x 6.5
- PH0 / PH1 / PH2 or PZ0 / PZ1 / PZ2
- PZ/FL 1
- PZ/FL 2
- Square socket key

PH
PZ

TQ

Video 102700

1000 V IEC 60900:2012

HAUPA „Vario“ 1000 V replaceable blade system

Vario 1000V

Art. no. 102000
Phillips, 10 pcs.

Art. no. 102000/PZ
Pozidriv, 10 pcs.

in robust nylon bag, Contents: 2C exchangeable handle, screw cap, replaceable blade - slotted blade 0.4 x 2.5 / 0.5 x 3.0 / 0.8 x 4.0 / **PH1 / PH2 or PZ1 / PZ2**, PZ/FL 2, switch cabinet key – square 1, double-bit

Further characteristic feature include:

- High level of safety
- Exchangeable cap for use as an electronics screwdriver
- Switching cabinet key is integrated into the system
- Space-saving
- Weight-saving
- Cost-effective price/performance ratio
- Meets all relevant standards

PH
PZ

Video 102000

1000 V IEC 60900:2012

„VarioTQ“ dynamometric screw-driver with replaceable blades

VarioTQ 1000V

Art. no. 102702
Tx, **1 - 6 Nm**

insulated replaceable blade made from molybdenum vanadium steel, hardened, blasted, with hexagonal shaft, in robust nylon bag (with belt loop and hook and loop closure)

- torque can be set using a separate key
- scale value can easily be read off
- clearly perceptible and audible signal when the set torque is achieved
- torque accuracy according to EN ISO 6789:2003

Contents: 11-pieces

- 2-component exchangeable handle (1000 V) 1 - 6 Nm
- TX 8 - 9 - 10 - 15 - 20 - 25 - 30
- PZ/FL 1
- PZ/FL 2
- Square socket key

TQ

Tx

1000 V IEC 60900:2012

„VarioTQ“ dynamometric screw-driver with replaceable blades

VarioTQ

Art. no. 102704
Hex, **1 - 6 Nm**

insulated replaceable blade made from molybdenum vanadium steel, hardened, blasted, with hexagonal shaft, in robust nylon bag (with belt loop and hook and loop closure)

- torque can be set using a separate key
- scale value can easily be read off
- clearly perceptible and audible signal when the set torque is achieved
- torque accuracy according to EN ISO 6789:2003

Contents: 11-pieces
- 2-component exchangeable handle (1000 V) 1 - 6 Nm
- HEX 2 - 3 - 3.5 - 4 - 4.5 - 5 - 5.5 mm
- PZ/FL 1
- PZ/FL 2
- Square socket key

TQ

Hex

1000 V IEC 60900:2012

Tool case 1000 V, 3/8“

3/8"

Art. no. 220402
16 pcs.

made of plastic, complete with 3/8“ tools. The plastic material used for socket sets is guaranteed to pass –40°c impact tests. This quarantee that the insulation value will not be compromised due to impact.
Dimension: 286 x 255 x 54 mm.

Contents:
- Reversible ratchet 200 mm, 3/8“
- T-slip-on-keys 200 mm, 3/8“
- Extension 150 and 250 mm, 3/8“
- Sockets 3/8“, 8, 10, 12, 13, 14, 17, 19, 22 mm
- Dies for hexagon srews 3/8“, 4, 5, 6, 8 mm

3/8"

Video 220402

1000 V IEC 60900:2012

Tool case 1000 V, 1/4“

1/4"

Art. no. 220576
18 pcs.

made of plastic, complete with 1/4“ tools. The plastic material used for socket sets is guaranteed to pass –40°c impact tests. This quarantee that the insulation value will not be compromised due to impact.
Dimension: 286 x 255 x 54 mm.

Contents:
- Reversible ratchet 150 mm, 1/4“
- T-slip-on-keys 125 mm, 1/4“
- Extension 100 and 150 mm, 1/4“
- Sockets 1/4“, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- Dies for hexagon srews 1/4“, 3, 4, 5, 6 mm

1/4"

Video 220576

1000 V IEC 60900:2012

Tool case 1000 V, 1/2“

1/2"

Art. no. 220404
20 pcs.

made of plastic, complete with 1/2“ tools. The plastic material used for socket sets is guaranteed to pass –40°c impact tests. This quarantee that the insulation value will not be compromised due to impact.
Dimension: 380 x 316 x 61 mm.

Contents:
- Reversible ratchet 250 mm, 1/2“
- T-slip-on-keys 200 mm, 1/2“
- Extension 125 and 250 mm, 1/2“
- Sockets 1/2“, 10, 11, 12, 13, 14, 17, 19, 22, 24, 27, 32 mm
- Dies for hexagon srews 1/2“, 4, 5, 6, 8, 10 mm

1/2"

Video 220404

1000 V IEC 60900:2012

haupa®
...convincing solutions

Tool sets

Set with 2 tools and electrical insulating tape

Art. no. 211219/Z1
3 pcs.

Heavy duty side cutters DIN ISO 5749 VDE
Cable stripper „Basic“
for stripping common round cables with rubber or hard plastic sleeves – Ø 4 to 13 mm – and flat cables up to 12 mm in width (e.g. 3 x 1.5 to 5 x 2.5 mm² NYM cables, insulated flat cables or flexible cables).
Electrical insulating tape for professional use, “Rainbow Pack”, 10-piece

DIN EN 60454-3-1

1000 V IEC 60900:2012

Torch brazing set SolderingKit Set HUPshrink31DW-A

Art. no. 262098/Z1
12 pcs. + set

12-pieces, for pocket lighter butane gas, for operation without disruptive cables, where electrical power is impossible, replaceable attachments for heat shrinking work, micro-welding and cutting plastic film and panels, with Piezo ignition, heating time: +/- 25 seconds (peak), performance can be infinitely regulated, temperatures with naked flame up to bis 1200 °C, brazing up to 550 °C, heat shrinking up to 680 °C, burn time approximately 60 minutes, in black plastic case.

Set: double-walled 3:1 with adhesive lining
Art. 267204, 25 pieces, in plastic case

Set with 4 tools

Art. no. 200050/Z1
4 pcs.

Side cutters DIN ISO 5749 VDE
Stripper „All-rounder“
- Cable stripper for round cables from Ø 4 - 15 mm and flat cables up to 15 mm width

Screwdriver set with PZ slot profile
- (Art. 101870, TL: 205 mm, CL: 80 mm)
- (Art. 101872, TL: 270 mm, CL: 100 mm)

Set with 7 tools

Art. no. 212683/Z1
7 pcs.

Screwdrivers set 1000 V, Phillips, 6 pieces
Content: Electricians’ screwdriver 1000 V, 2.5 x 75 mm / 4 x 100 mm / 5.5 x 125 mm / 6.5 x 150 mm, Cross slotted screwdrivers 1000 V, Phillips size 1 and 2
Automatic wire stripper
- for solid and flexible cables
- automatic setting to the cross-section
- Working range of 0.5 to 4 mm²
- integrated side cutter up to 2.5 mm²

Set with 4 tools

Art. no. 211204/Z1
4 pcs.

Side cutters DIN ISO 5749 VDE
Cable stripping knive “Basic”, with hook blade, 8 – 28 mm²
- for removing the sleeve from all current round cables
- Cutting depth can be adjusted using the setting screw on the end of the handle
- Automatic adjustment to round and lengthwise cuts
- Housing made from high-quality, hard wearing polyamide

Electricians screwdrivers Slot 1000 V
Cross slotted screwdrivers Phillips 1000 V

„VarioTQ“ dynamometric screw-driver with replaceable blades

VarioTQ

Art. no. 103000
Mix, **1 - 6 Nm**

replaceable dual blades made from molybdenum-vanadium steel, sanded blade, hardened, blast-finished, chrome plated with black point, with hexagonal shaft, in robust nylon bag (with belt loop and hook and loop closure), 10 replaceable blades (**20 profiles**)

- torque can be set using a separate key
- scale value can easily be read off
- clearly perceptible and audible signal when the set torque is achieved
- torque accuracy according to EN ISO 6789:2003

Contents: 12-pieces
- 2-component exchangeable handle 1 - 6 Nm
- slotted 3/4 – 5.5/6.5
- PH0/PH1
- PZ0/PZ1
- PH2/PZ2
- TX 10/15 – 20/25
- HEX 2/3 – 4/5
- PZ/FL1 – PZ/FL2
- Square socket key

Video 103000

TQ

Mix

Hexagon angle screwdriver set, with spherical head

Art. no. 100965
9 pcs., size 1,5 - 10 mm

Art. no. 100967
9 pcs., size 1/16"- 3/8"

Made from chrome vanadium steel, blades hardened throughout, nickel plated, **extra long**, metric or AF, with spherical head, in folding holder.

Content metric:
WS: Hex 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10

Content AF:
WS: Hex 1/16 - 5/64 - 3/32 - 1/8 - 5/32 - 3/16 - 1/4 - 5/16 - 3/8"

100965 360°

Spanners for switch cabinet key, „HUPkey Uni“

Art. no. 110698

spanner for switch cabintes with push construction, bitholder and bit on chain, external square 7 + 8 mm, inside square 6, 7, 8, 9 mm, double size 3 - 5 mm, inside threesquare 7, 8, 9, 10, 11 mm

not available in GB and FR

Video 110698



Hexagon screwdriver set T-handle, with spherical head

Art. no. 100961
8 pcs., size 2 – 10 mm

Made from chrome vanadium steel, completely hardened, chrome plated with 2-component handle, hexagonal with spherical head.

Contents:
WS: Hex 2, 2.5, 3, 4, 5, 6, 8, 10

haupa®
...convincing solutions

Hole saw with edge countersink and board ejector

Art. no. 231929
Ø 68 mm

- For setting wall-flush sockets, Ø 68 mm
- Cutting depth 40 mm
- High concentricity
- Specially for plasterboard, softwood, plywood, Fermacell etc.
- 11 mm hexagonal holder
- In plastic box

LONG LIFE

Diamond cutting disk „Spezial“

Art. no. 230727
115 mm

Art. no. 230731
125 mm

Short-toothed vacuum coating of a new generation for metal work. High diamond concentration enables the processing of materials impossible with traditional diamond tools.

These HAUPA discs can cut **everything but stone***!*

- Versatile scope of application (metal profiles, iron, die cast, steel, steel pipes, wood, Inox, GRP, CFP, polycarbonate, stoneware, fine stoneware)
- Constantly maintained diameter, thus always full cutting depth
- High cutting speed
- High level of durability (20 - 40 times more than normal, depending on materials cut)
- Reduced incidence of sparks
- Reduced odour development
- Unlimited storage times

Video 230727

LONG LIFE

Ratchet screwdriver set „FlexBag“

FlexBag

Art. no. 104020
51 pcs., Bit: 50 mm

with 50 mm S2 bits and reduced shank

Ratchet screwdriver with right/left hand motion. Adjustable operating angle of 180°. Safety and special bit set - top quality S2! The screwing grasp also Quick change penholder and 2-components Handle provides for anti-slip and fatiguefree working. The ergonomic form and the soft zones within the pressure area range make a relaxed possible screws. With hanging up hole.

Contents:
1/4" 50 mm Power bits Tx:
T5, T6, T7, T8, T9, T10, T15, T20, T25, T30, T40
1/4" 50 mm Power bits Hex: H2, H2.5, H3, H4, H5, H6
1/4" 50 mm Power bits PH: 0, 1, 2, 3
1/4" 50 mm Power bits PZ: 0, 1, 2, 3
1/4" 50 mm Power bits slot: 3, 4, 5, 6, 7, 8
1/4" 50 mm Power bits SQ: 0, 1, 2, 3
1/4" 50 mm Power bits Tri-Wing: 1, 2, 3
1/4" 50 mm Power bits PZ/FL 1 & 2
Above bits are in reduced shank except T40, H6, flat: 6, 7, 8 in full hex shank
2 pcs. Adapters: 1/4" 50 mm, 1/4" 80 mm
8 pcs. sockets: 5, 5.5, 6, 7, 8, 10, 12, 13
1 pc of „FlexPlus“ ratcheting driver

Video 104020

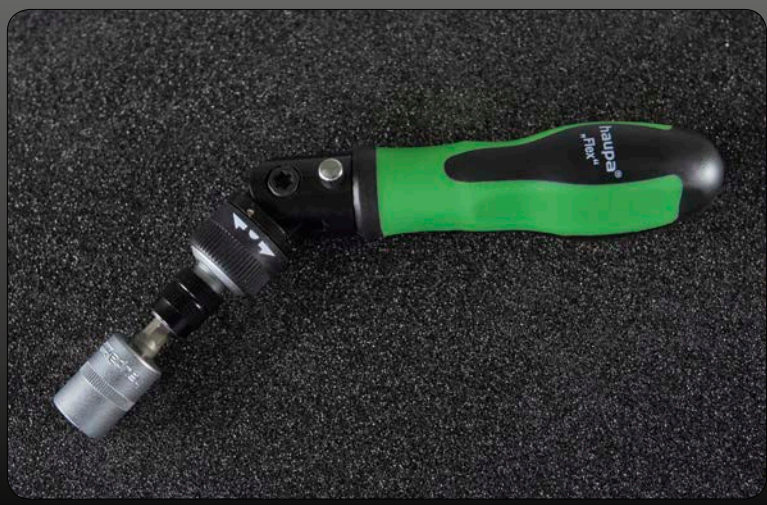

Socket set

1/4"

Art. no. 110674
33 pcs., 1/4"

chrome vanadium steel, industrial quality GS tested, black plastic case with metal catch with metal catch.

Contents: 1/4"
12 Sockets:
4 - 4.5 - 5 - 5.5 - 6 - 7 - 8 - 9 - 10 - 11 - 12- 13 mm,
1 ratchet handle,
2 gears with quick release function,
1 flexible extension bar,
2 extension bars 50 & 100 mm,
1 universal joint,
1 sliding adapter 3/8" x 1/4" for extension bar work as T handle,
1 spinner handle for screwdriver
14 insert bit socket PH: 1 - 2 - 3,
HX: 3 - 4 - 5 - 6 - 8,
TX: 10 - 15 - 20 - 25 - 27 - 30

Socket set

1/4" 1/2"

Art. no. 110678
53 pcs., 1/4" + 1/2"

chrome vanadium steel, industrial quality GS tested, black plastic case with metal catch with metal catch.

Contents: 1/4"
12 Sockets
4 - 4.5 - 5 - 5.5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm,
1 ratchet handle,
1 universal joint,
1 sliding adapter 3/8" x 1/4" for extension bar work as T handle,
2 extension bars 50 + 150 mm,
1 spinner handle for screwdriver,
12 insert bit sockets: PH: 1 - 2,
HX: 3 - 4 - 5 - 6,
FD: 5.5 - 7,
TX: 20 - 25 - 27 - 30,
5 Hex keys: 1.25 - 1.5 - 2.0 - 2.5 - 3.0 mm

Contents: 1/2"
13 sockets 10 - 11 - 12 - 13 - 14 - 15 - 17 - 19 - 22 - 24 - 27 - 30 - 32 mm,
1 ratchet handle,
2 extension bars 75 + 250 mm,
1 sliding adapter 3/8" x 1/2" for extension bar work as T handle,
2 plug sockets,
1 universal joint

All parts of the Socket Sets also loose available!

haupa®
...convincing solutions

LED „Mini Torch“

Art. no. 130310
TL: 20 x 92,5 mm

- Compact
- Very small and light
- Extremely high lighting performance
- LED 3 Watt CREE XR-E
- 1xAAA battery

LED
3W
CREE XR-E

LED „Focus Torch“

Art. no. 130312
TL: 34,4 x 115 mm

- Adjustable focus for near and far
- LED 3 Watt CREE XP-E
- 3xAAA batteries

LED „IP67 Torch“

Art. no. 130314
TL: 40,5 x 141 mm

- IP67, dust-tight, protected against brief submersion (water-tight)
- 1 x switch operation 100 % lighting performance
  2 x switch operation 30 % lighting performance
- LED 5 Watt CREE XP-G
- 4xAAA batteries

LED „RC Torch“

Art. no. 130316
TL: 40,5 x 180 mm

- Rechargeable battery, lithium-ion 2200 mAH 3.7 V
- Integrated charging unit
- 1 x switch operation 100 % lighting performance
  2 x switch operation 30 % lighting performance
- Additional battery holder as backup
- Deep discharge protection
- LED 5 Watt CREE XP-G
- Charging cable 230 Volt, charging cable for automobile
- Battery holder (battery operation is an alternative)

Akku
Li-Ion
2200 mAH
3,7 V

LED „Max Torch“

Art. no. 130324
TL: 40,5 x 234 mm

- Illumination range: 300 m
- LED 10 Watt CREE XML-T6
- Extreme illumination range
- 1 x switch operation 100 % lighting performance,
  2 x switch operation 25 % lighting performance
- 3xC batteries included
- Including wrist strap

LED
10W
CREE XML-T6

LED „Pen Torch“

Art. no. 130328
TL: 14 x 143 mm

- Illumination range: 50 m
- 50 Lm
- LED 1 Watt CREE
- With clip
- 2xAAA batteries

LED
1W
CREE

LED „Headlight“

Art. no. 130318
TL: 143 mm

- Very light and balanced headlamp (battery compartment at the rear)
- 4 lighting levels:
  Switch position 1 = 100 % lighting performance
  Switch position 2 = 80 % lighting performance
  Switch position 3 = 30 % lighting performance
  Switch position 4 = red LED
- LED 3 Watt CREE XP-E
- 2xAA batteries

LED 3W CREE XP-E

Signal light „HUPemergency“

Art. no. 130326
TL: 105 x 35 mm



- 16 x LED
- 9 different flashing modes
- High-quality plastic, drop-protected and weather-proof
- Integrated lithium ion battery pack
- Charging cable 230 Volt, car charging cable
- Magnetic, with hanging eye

Akku Li-Ion 603648

While stocks last!

Video 130326

Mini working light “HUPlight4”

Art. no. 130336
4 Watt

- Rechargeable battery, lithium-ion 1800 mAH 3.7 V • LED 4 Watt
- Approximately 200 Lumen lighting performance
- Approximately 3 hours lighting performance
- Lamp may be charged using the micro USB port
- Stand may be angled
- Dual magnetic bracket
- Hook for securing and hanging
- Can be used and carried everywhere

Akku Li-Ion 1800 mAH 3,7 V

haupa®
...convincing solutions

HAUPA GmbH & Co. KG, Königstraße 165-169, D-42853 Remscheid, Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418840, E-Mail: sales@haupa.com.
Prices on request. Errors and technical changements reserved.

Compact floodlight “HUPlight10”

Art. no. 130330
10 Watt



- Rechargeable battery, lithium-ion 4400 mAH 7.4 V • LED 10 Watt
- High quality aluminium housing, protected against spray water in accordance with IP54
- Extremely bright light
- Lighting performance is variable, can be dimmed
- Up to 7 hours of operating power
- External devices may be charged via USB connections
- Charging cable 230 Volt, car charging cable



Compact floodlight “HUPlight20”

Art. no. 130332
20 Watt



- Rechargeable battery, lithium-ion 8800 mAH 7.4 V • LED 20 Watt
- High quality aluminium housing, protected against spray water in accordance with IP54
- Extremely bright light
- Lighting performance is variable, can be dimmed
- Up to 8 hours of operating power
- External devices may be charged via USB connections
- Charging cable 230 Volt, car charging cable



Compact floodlight “HUPlight50” with Bluetooth

Art. no. 130338
50 Watt



- Lithium-ion battery 13.2 AH 7.4 V
- 50 Watt LED
- High quality aluminium housing + PC, protects against splashes according to IP54
- Extremely bright light
- Lighting performance is variable, 50% | 100%
- Operating time:
  - about 5 hours for just the lighting (at 100% light intensity),
  - about 10 hours for just the lighting (at 50% light intensity),
  - about 4 hours for lighting + Buetooth oudspeaker,
  - around 15 hours for just the Buetooth loudspeaker.
- Loading of external devices via USB port
- Charger: 230 V Power Supply (12 V 2.3 A)
- 12 V Car charger
- Bluetooth
- adjustable stand

Akku Li-Ion 13,2 Ah 7,4 V

USB

130338 | 360°

Combination pack

Compact floodlight “HUPlight50” with Bluetooth and 2 battery packs

Art. no. 130338/A
50 Watt

Product description and technical specifications can be found under Art.-No. 130338.

2 battery packs

Optional accessories

Replacement battery to “HUPlight50”

Art. no. 130339
7,4 Volt, 13,2 Ah

- Lithium-ion battery 13.2 AH 7.4 V
- protected against spray water in accordance with IP54
- Charging time: approx. 5 hours

Akku Li-Ion 13,2 Ah 7,4 V

Magnetic holder for “HUPlight50”

Art. no. 130340
170 x 140 x 40 mm

- extra strong magnet for a flexible fixing

Stand for “HUPlight50“

Art. no. 130342
115 x 115 x 180 cm

- Dimensions: 115 x 115 x 180 cm
- Adjustable height maximum 1.80 m
- Weight: ca. 3,5 kg

1,80 m

haupa®
...convincing solutions

HAUPA GmbH & Co. KG, Königstraße 165-169, D-42853 Remscheid, Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418840, E-Mail: sales@haupa.com.
Prices on request. Errors and technical changements reserved.

Our PU cut-protection gloves are used to protect against mechanical risks, in accordance with EN 388 and EN 420.
The „Hammer“ pictogram defines the performance level of the product.

Example:

Abrasion resistance	➔	4
Cut resistance	➔	5
Tear propagation strength	➔	4
Penetration resistance	➔	4

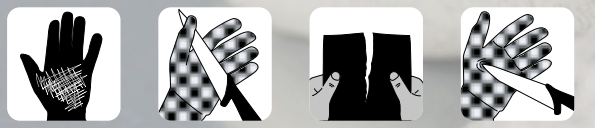

Leather working glove

Ideal for medium severity work in the construction, warehousing and transportation sectors, PSE in accordance with category 1 of the directive 89/686/EEC

- Split pigskin leather: Heat and cold resistant, high abrasion resistance, good skin protection
- Back of hand made from cotton
- Canvas cuff
- Single size 10.5

Art. no. 120310
Size: 10,5

PU cut-protection glove, level 3

For high mechanical loads, good cut-protection due to cut-resistance level 3

- HPPE fibre
- PU coating on palm and fingertips: Flexible and elastic, high abrasion resistance, safe grip
- Excellent fit, pleasant wearing comfort
- Area of use: Warehousing and assembly work, fine mechanical tasks with slightly sharp objects

Art. no. 120302/9
Size: 9

Art. no. 120302/10
Size: 10

Art. no. 120302/11
Size: 11



PU textile glove

Ideal for fine mechanical tasks and low mechanical loads

- HPPE fibre
- Thin PU coating on palm and fingertips: Flexible and elastic, high abrasion resistance, safe grip
- Excellent fit, pleasant wearing comfort
- Area of use: Warehouse and assembly work, fine mechanical tasks

Art. no. 120300/9
Size: 9

Art. no. 120300/10
Size: 10

Art. no. 120300/11
Size: 11

PU cut-protection glove, level 5

High cut-protection thanks to cut-resistance level 5, for high mechanical loads

- HPPE fibre
- Thick PU coating on palm and fingertips: Flexible and elastic, high abrasion resistance, safe grip
- Excellent fit, pleasant wearing comfort
- Area of use: Warehousing and assembly work, fine mechanical tasks with sharp objects

Art. no. 120304/9
Size: 9

Art. no. 120304/10
Size: 10

Art. no. 120304/11
Size: 11