



Steckverbinder

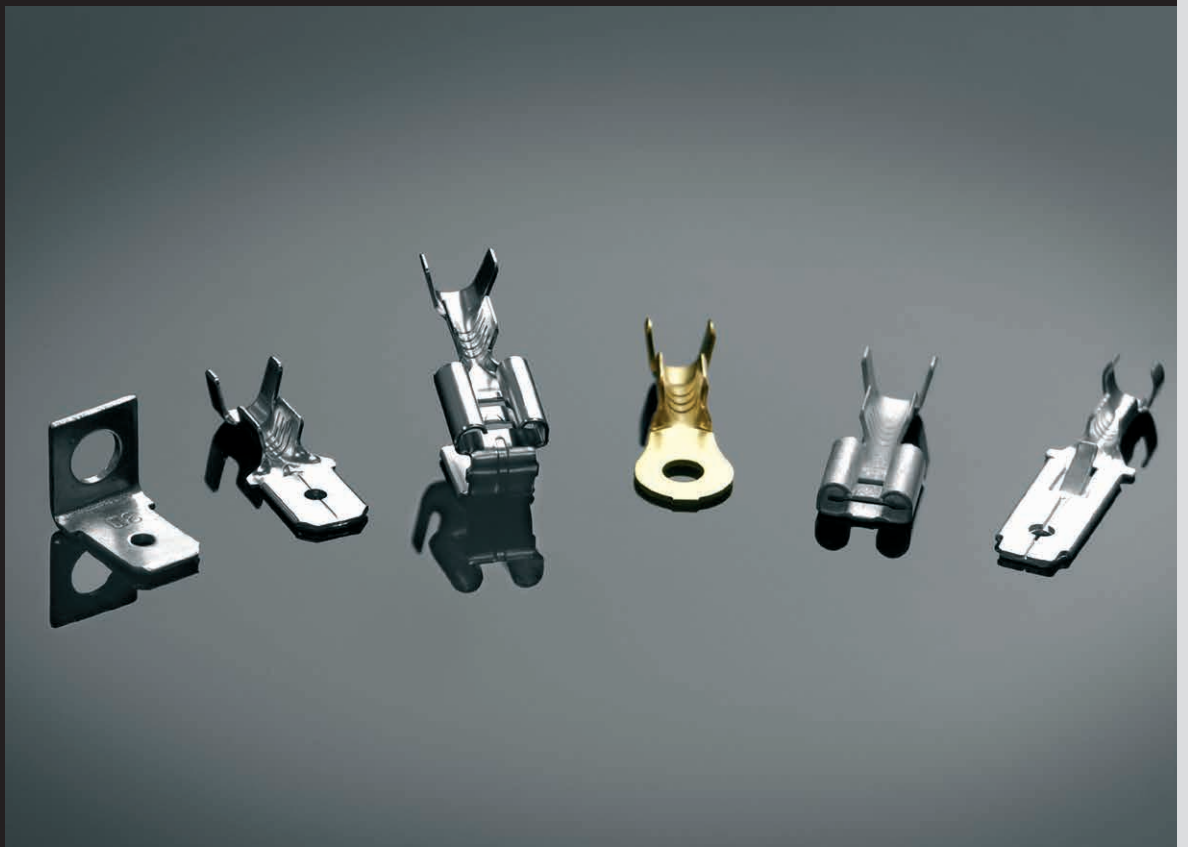

Flachsteckhülsen

- Messing blank
- nicht isoliert nach DIN 46247/Teil 1 - 3 und ähnliche Ausführungen


Art. Nr.	LQ	FSt.	GL	c	B	kg/100	VE
280000	0,5 - 1	6,3x0,8	19,2	7,6	7,6	0,073	200
280004	1 - 2,5	6,3x0,8	19,2	7,6	7,6	0,079	200
280008	0,5 - 1,25	4,8x0,8	15,0	6,4	5,6	0,075	200
280012		4,8x0,5	15,0	6,4	5,6	0,043	200
280016		2,8x0,8	16,0	6,4	3,75	0,040	200
280020		2,8x0,5	16,0	6,4	3,75	0,020	200



Flachsteckhülsen

- Messing verzinkt
- nicht isoliert nach DIN 46247/Teil 1 - 3 und ähnliche Ausführungen


Art. Nr.	LQ	FSt.	GL	c	B	kg/100	VE
280030	0,5 - 1,0	6,3x0,8	19,2	7,6	7,6	0,073	200
280034	1,0 - 2,5	6,3x0,8	19,2	7,6	7,6	0,038	200
280038	0,5 - 1,25	4,8x0,8	15,0	6,4	5,6	0,0410	200
280042		4,8x0,5	15,0	6,4	5,6	0,027	200
280046		2,8x0,8	16,0	6,4	3,75	0,023	200
280050		2,8x0,5	16,0	6,4	3,75	0,027	200



Flachsteckhülsen

- Messing blank, nicht isoliert
- mit seitlichem Leiteranschluss


Art. Nr.	LQ	FSt.	GL	c	B	kg/100	VE
280060	0,5 - 1,0	6,3x0,8	14,1	7,6	7,6	0,073	200
280064	1,0 - 2,5	6,3x0,8	14,1	7,6	7,6	0,078	200



Flachsteckhülsen

- Messing verzinkt, nicht isoliert
- mit seitlichem Leiteranschluss


Art. Nr.	LQ	FSt.	GL	c	B	kg/100	VE
280070	0,5 - 1,0	6,3x0,8	14,1	7,6	7,6	0,075	200
280074	1,0 - 2,5	6,3x0,8	14,1	7,6	7,6	0,078	200



Flachsteckhülsen mit Abzweig

- Messing blank, nicht isoliert
- mit Abzweig


Art. Nr.	LQ	FSt.	GL	c	B	kg/100	VE
280080	0,5 - 1,0	6,3x0,8	19,6	7,7	7,6	0,108	200
280084	1,0 - 2,5	6,3x0,8	16,2	7,7	7,6	0,103	200



Flachsteckhülsen mit Abzweig

- Messing verzinkt, nicht isoliert
- mit Abzweig


Art. Nr.	LQ	FSt.	GL	c	B	kg/100	VE
280090	0,5 - 1,0	6,3x0,8	19,6	7,7	7,6	0,110	200
280094	1,0 - 2,5	6,3x0,8	16,2	7,7	7,6	0,112	200



Flachstecker

- Messing blank
- nicht isoliert


Art. Nr.	LQ	FSt.	GL	c	B	kg/100	VE
280100	0,5 - 1,0	6,3x0,8	20,6	6,35	6,3	0,055	200
280104	1,0 - 2,5	6,3x0,8	17,2	6,35	6,3	0,057	200



Flachstecker

- Messing verzinkt
- nicht isoliert

Art. Nr.	LQ	FSt.	GL	c	B	kg/100	VE
280110	0,5 - 1,0	6,3x0,8	20,6	6,35	6,3	0,054	200
280114	1,0 - 2,5	6,3x0,8	17,2	6,35	6,3	0,057	200



haupa®

... Lösungen, die überzeugen


HAUPA, Königstr. 165-169, 42853 Remscheid, Tel.: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, sales@haupa.com;
HAUPA, Bayernstraße 39, 5071 Wals-Siezenheim/Salzburg, Tel. +43 (0)662 854717, Fax +43 (0)662 854632, haupa.austria@haupa.com

Flachstecker mit Rasterzunge

- Messing blank
- nicht isoliert



Art. Nr.	LQ	FSt.	GL	c	B	kg/100	VE
280101	0,5 - 1,0	6,3x0,8	20,6	6,35	6,3	0,200	200
280105	1,0 - 2,5	6,3x0,8	17,2	6,35	6,3	0,085	200




Flachstecker mit Rasterzunge

- Messing verzinkt
- nicht isoliert



Art. Nr.	LQ	FSt.	GL	c	B	kg/100	VE
280111	0,5 - 1,0	6,3x0,8	20,6	6,35	6,3	0,082	200
280115	1,0 - 2,5	6,3x0,8	17,2	6,35	6,3	0,089	200



Ringkabelschuhe

- Messing blank
- nicht isoliert

Art. Nr.	LQ	M	d2	GL	B	kg/100	VE
280120	0,5 - 1,0	3	3,2	21,0	8,0	0,054	200
280124		4	4,3	21,0	8,0	0,038	200
280128		5	5,08	22,0	9,5	0,068	200
280132	1,0 - 2,5	3	3,2	21,0	8,0	0,076	200
280136		4	4,3	21,0	8,0	0,046	200
280140		5	5,08	22,0	9,5	0,045	200



Ringkabelschuhe

- Messing verzinkt
- nicht isoliert


Art. Nr.	LQ	M	d2	GL	B	kg/100	VE
280150	0,5 - 1,0	3	3,2	21,0	8,0	0,057	200
280154		4	4,3	21,0	8,0	0,040	200
280158		5	5,08	22,0	9,5	0,056	200
280162	1,0 - 2,5	3	3,2	21,0	8,0	0,076	200
280166		4	4,3	21,0	8,0	0,046	200
280170		5	5,08	22,0	9,5	0,043	200



Flachstecker

- Messing blank
- nicht isoliert

Art. Nr.	FSt.	d2	GL	Form	kg/100	VE
280180	6,3x0,8	4,2	19,2	1 0°	0,076	200
280182	6,3x0,8	4,2	10,2	5 45°	0,082	200
280184	6,3x0,8	4,2	11,3	2 90°	0,085	200
280186	6,3x0,8	4,2	30,3	4 0°	0,136	200
280188	6,3x0,8	4,2	11,45	3 90°	0,134	200

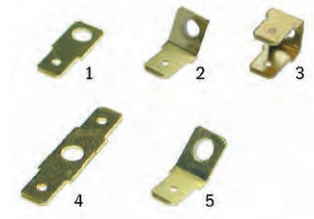

Flachstecker

- Messing verzinkt
- nicht isoliert


Art. Nr.	FSt.	d2	GL	Form	kg/100	VE
280190	6,3x0,8	4,2	19,2	1 0°	0,083	200
280192	6,3x0,8	4,2	10,2	5 45°	0,084	200
280194	6,3x0,8	4,2	11,3	2 90°	0,095	200
280196	6,3x0,8	4,2	30,3	4 0°	0,137	200
280198	6,3x0,8	4,2	11,45	3 90°	0,272	200



Isolierhülsen

- aus PVC und Nylon


Art. Nr.	FSt.	Form	Material	kg/100	VE
280200	6,3x0,8	1	PVC	0,056	100
280202	6,3x0,8	2	Nylon	0,069	100
280204	4,8x0,8	6	PVC	0,047	100
280206	4,8x0,8	2	Nylon	0,071	100
280208	2,8x0,8	6	PVC	0,036	100
280210	2,8x0,8	5	Nylon	0,043	100
280212	6,3x0,8	4	PVC	0,063	100
280214	6,3x0,8	3	Nylon	0,048	100



Elastik-Steckverbinder mit Flachsteckern

- 1 - 12 polig
- PVC, Farbe natur

Art. Nr.	FSt.	GL	Form	B	Material	kg/100	VE
280460	2,8x0,8	7,5	1	35,0	PVC	0,157	100
280482	2,8x0,8	88,0	12	35,0	PVC	1,770	10
280490	4,8x0,8	12,5	1	28,0	PVC	0,200	100
280512	4,8x0,8	147,0	12	28,0	PVC	2,800	10
280520	6,3x0,8	12,5	1	28,0	PVC	0,240	100
280542	6,3x0,8	147,0	12	28,0	PVC	2,850	10
280550	2,8x0,8	12,5	1	28,0	PVC	0,250	100
280572	2,8x0,8	147,0	12	28,0	PVC	0,440	50

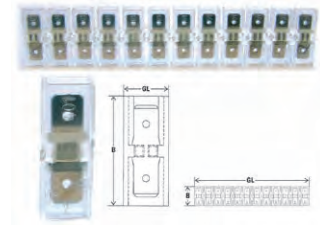

Elastik-Leitungsverteiler

- PVC, Farbe natur

Art. Nr.	FSt.	GL	Form	c	Material	kg/100	VE
280580	6,3x0,8	53,0	1	15,0	PVC	0,500	50
280582	6,3x0,8	51,0	2	13,0	PVC	0,500	50

